

GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function



Features:

- Constant power design with adjustable output current
- Output current adjustable via infrared controller or software interface
- Built-in active PFC function
- Universal AC input / Full range
- Protections: Short Circuit / Over Voltage / Over Temperature
- Cooling by free air convection
- Surge immunity: Differential Mode - 5kV, Common Mode - 10kV
- Dimming 3 in 1 (1-10V, PWM, Time dimming) function for M version
- IP67 design for indoor and outdoor applications

Application:

- LED street / tunnel lighting
- Industrial lighting
- Flood lighting
- Grow lights



© MODEL INFORMATION

Model Number	Output Power [W]	Output Current adjustable range [A]		Output Voltage Range [V]		Default Spec		Efficiency typ. [%]	No load max. Output Voltage [V]
		min	max	min	max	Voltage [V]	Current [A]		
GLDP-240X041 (X = M, R)	240.2	0.75	7.50	20	41	36	6.7	92%	44
GLDP-240X062 (X = M, R)	240	0.52	5.20	20	62	48	5	92%	80
GLDP-240X180 (X = M, R)	239.4	0.21	2.10	80	180	170	1.4	92%	200
GLDP-240X368 (X = M, R)	239.2	0.11	1.10	190	368	228	1.05	93%	390

© APPROVAL MARKS and SYMBOLS

GLDP-240X041 (X = M, R)	CE	RoHS	IP67	SELV	tc: 85°C ta: 50°C	25	TUV
GLDP-240X062 (X = M, R)	CE	RoHS	IP67	SELV	tc: 85°C ta: 50°C	25	TUV
GLDP-240X180 (X = M, R)	CE	RoHS	IP67		tc: 85°C ta: 50°C	25	TUV
GLDP-240X368 (X = M, R)	CE	RoHS	IP67		tc: 85°C ta: 50°C	25	TUV

© MODEL ENCODING

GLDP	-	240	X	Y
Series name	Rated Output Power [W]		R - no dimming	041 - max output voltage is 41V
			M - 1-10V, PWM dimming	062 - max output voltage is 62V
				180 - max output voltage is 180V
				368 - max output voltage is 368V

GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function



© ELECTRICAL SPECIFICATION

MODEL	GLDP-240X041	GLDP-240X062	GLDP-240X180	GLDP-240X368
OUTPUT				
VOLTAGE RANGE	20 ÷ 41VDC	20 ÷ 62VDC	80 ÷ 180VDC	190 ÷ 368VDC
NO LOAD VOLTAGE (MAX.)	44VDC	80VDC	200VDC	390VDC
CURRENT ADJUSTMENT RANGE	0.75 ÷ 7.50A	0.52 ÷ 5.20A	0.21 ÷ 2.10A	0.11 ÷ 1.10A
RATED POWER	240.2W	240W	239.4W	239.8W
FACTORY CURRENT / VOLTAGE	6.7A / 36VDC	5.0A / 48VDC	1.4A / 170VDC	1.05A / 228VDC
CURRENT ACCURACY	± 5.0%			
LINE REGULATION (FROM 105VAC TO 305VAC)	± 1.0%			
LOAD REGULATION (FROM 50% TO 100% LOAD)	± 3.0%			
CURRENT RIPPLE FOR LED LOAD (PEAK TO PEAK)	< 16% I _{OUT}			
SETUP TIME	< 0.5s / 230VAC at full load; < 3s / 115VAC at full load			

INPUT

VOLTAGE RANGE	90 ÷ 305VAC			
FREQUENCY RANGE	47 ÷ 63Hz			
EFFICIENCY AT 100% LOAD (TYP.)	91% / U _{OUT} = 32VDC	92% / U _{OUT} = 46VDC	92% / U _{OUT} = 114VDC	92% / U _{OUT} = 228VDC
	92% / U _{OUT} = 41VDC	92% / U _{OUT} = 62VDC	92% / U _{OUT} = 180VDC	93% / U _{OUT} = 368VDC
	Refer to Efficiency vs. Output Voltage Curve			
AC CURRENT (MAX.)	3.3A			
INRUSH CURRENT (MAX.)	75A / 230VAC			
LEAKAGE CURRENT (MAX.)	0.75mA / 277VAC			
STANDBY POWER CONSUMPTION	< 10W			
POWER FACTOR (TYP.)	0.96 / 230VAC at 100% load (Refer to Power Factor vs. Output Power Curve)			
THD	< 20% / 230VAC at 70-100% load (Refer to THD vs. Load Curve)			

PROTECTIONS

SHORT CIRCUIT	Type: hiccup mode, auto-recovery. Input power < 10W			
OVER VOLTAGE	44 ± 2VDC	75 ± 5VDC	195 ± 5VDC	385 ± 5VDC
	Type: shut off output voltage, restart on to recovery.			
OVER TEMPERATURE	Temperature of enclosure > 85°C			
	Type: Output current is limited in 30% (typ.)			

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ 60°C (Refer to Derating Curve)		
WORKING HUMIDITY	20 ÷ 95% RH non-condensing		
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 20 ÷ 95% RH non-condensing		
VIBRATION	10 to 500Hz sweep at constant acceleration 1G (depth 3.5mm) for 1 hour for each X, Y, Z axes		
DEGREE OF PROTECTION	[2]	IP67	

GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function



SAFETY AND EMC REGULATIONS

SAFETY STANDARDS	CB	IEC61347-1; IEC61347-2-13
	CE	EN61347-1; EN61347-2-13
EMC STANDARDS	CE	EN55015; EN61000-3-2; EN61000-3-3; EN61547
WITHSTAND VOLTAGE	IN/OUT: 3.75kVAC; IN/GND: 1.6kVAC; OUT/GND: 1.6kVAC; 60s, current < 10mA	
GROUNDING RESISTANCE	< 0.1Ω (60S/25A)	
INSULATION RESISTANCE	IN/OUT, IN/GND, OUT/GND > 50MΩ (500VDC/60s)	

OTHERS

Input Wire	H05RN-F 3 x 1.0mm ² , length = 600 ± 30mm
Output Wire	H05RN-F 2 x 1.5mm ² , length = 450 ± 30mm for GLDP-240X041, GLDP-240X062, GLDP-240X180
	H05RN-F 2 x 1.0mm ² , length = 450 ± 30mm for GLDP-240X368
Dimming Wire (only for M model)	2 x 22AWG, length = 400 ± 30mm
MTBF	200 000h at 230VAC / 80% load and ta < 25°C
Life Time (min.)	50 000h at 230VAC / 100% load and tc < 70°C (Refer to Life Time vs. T _c Curve)
Dimensions (Length * Width x Height)	247 * 68 * 43.5mm
Weight	1200 ± 100g


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Suitable for indoor or outdoor use. Please avoid direct exposure to sunlight and immersion in water for over 30 minutes.

3. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC and LVD Directives.

© MECHANICAL SPECIFICATION

GLDP-240R type

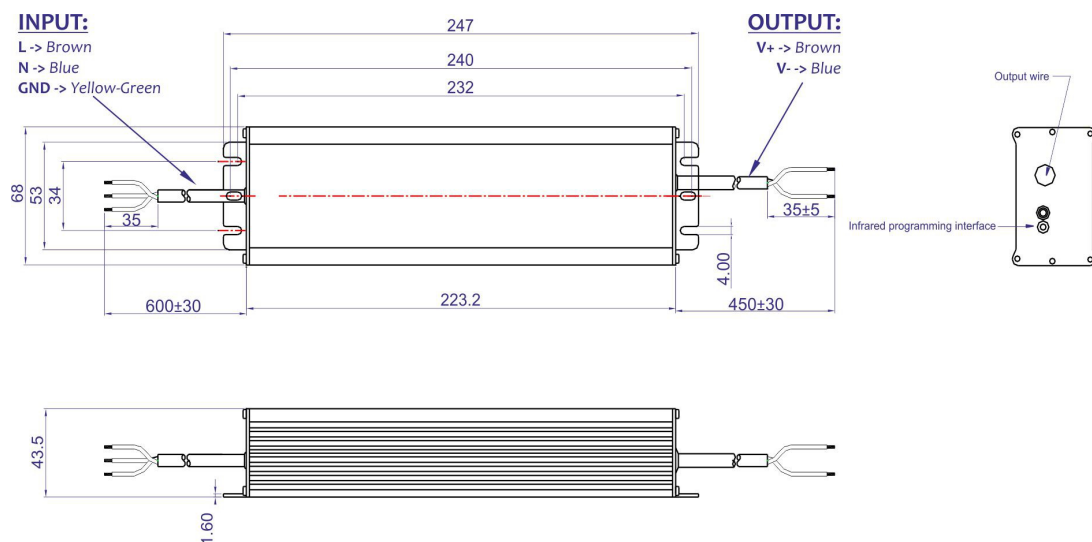


GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function




GLDP-240M type

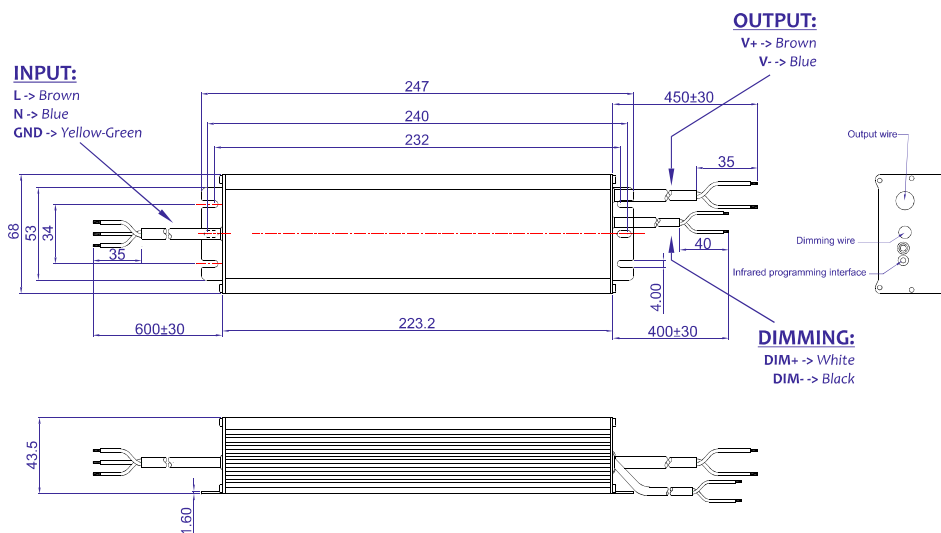


© Maximum Output Voltage vs. Output Current Curve


GLDP-240X041

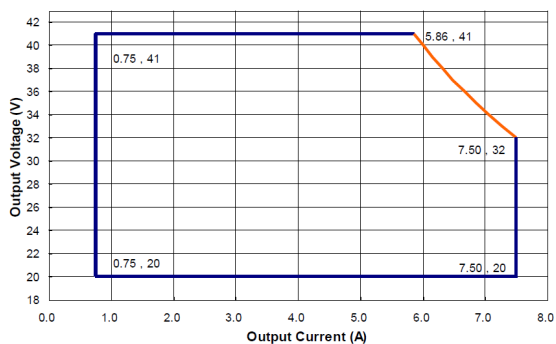


GLDP-240X062

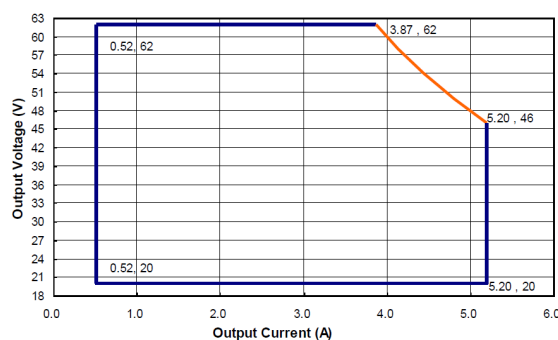

GLDP-240X180

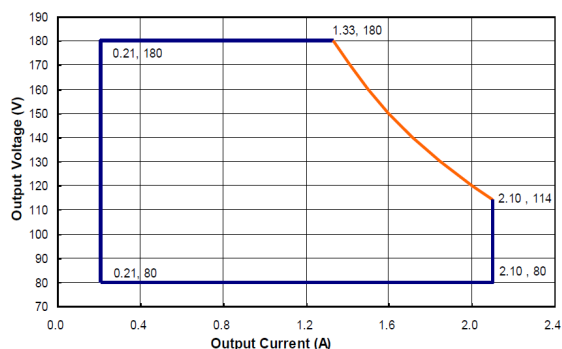

GLDP-240X368

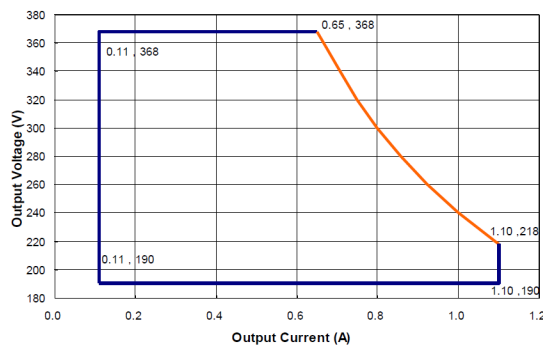


GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function




© Power Factor vs. Output Power Curve


GLDP-240X041

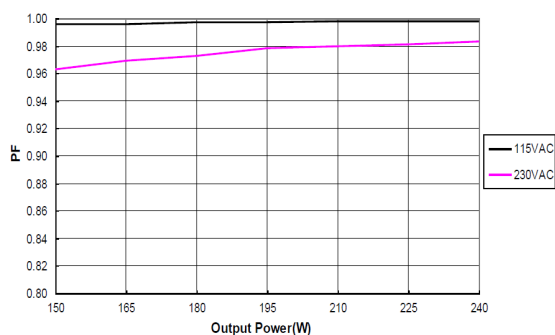


GLDP-240X062

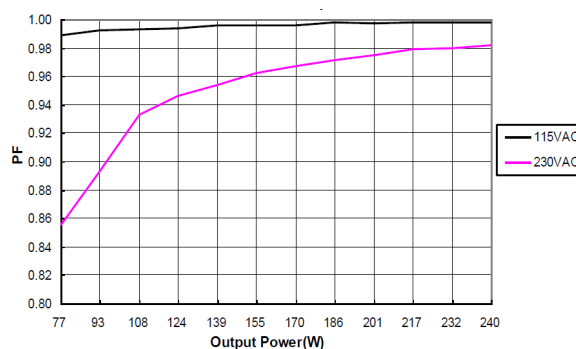

GLDP-240X180

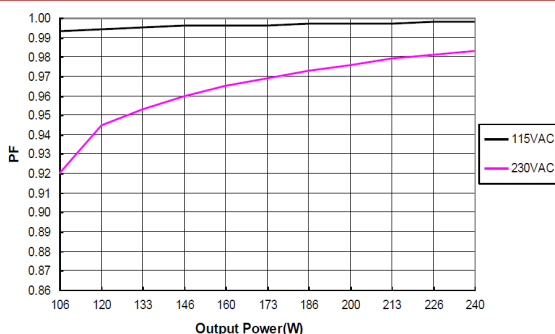


GLDP-240X368

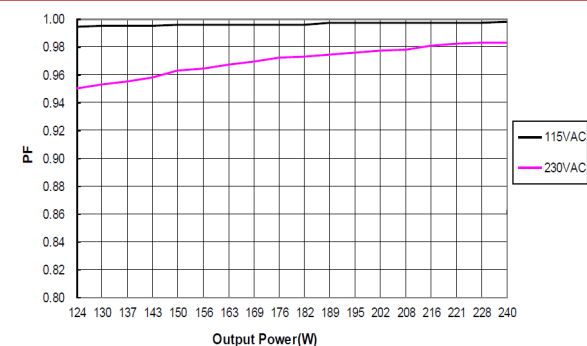


© Efficiency vs. Output Voltage Curve for 230VAC input


GLDP-240X041

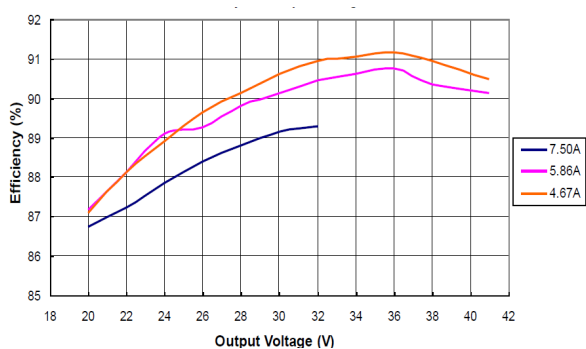


GLDP-240X062

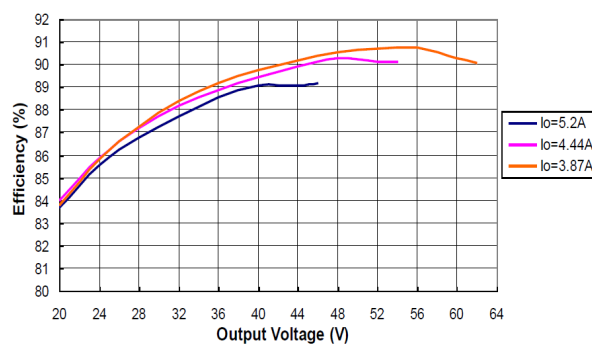

GLDP-240X180

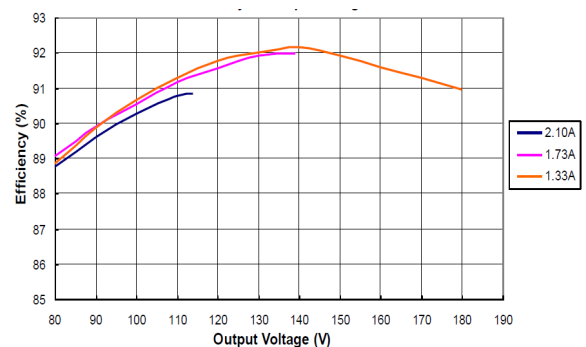

GLDP-240X368

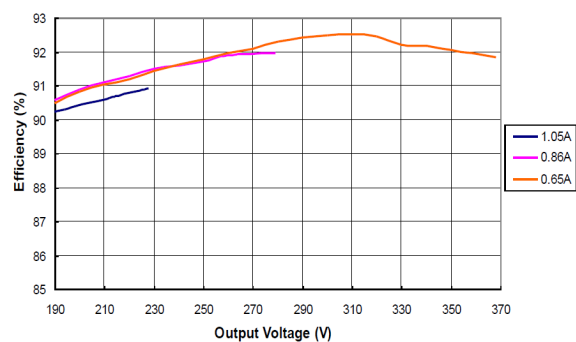


GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function




© THD vs. Load Curve


GLDP-240X041

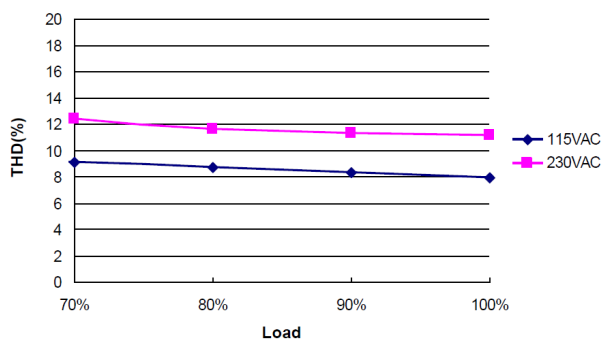


GLDP-240X062

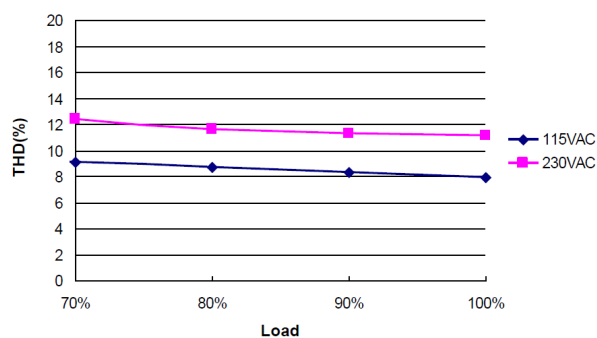


GLDP-240X180

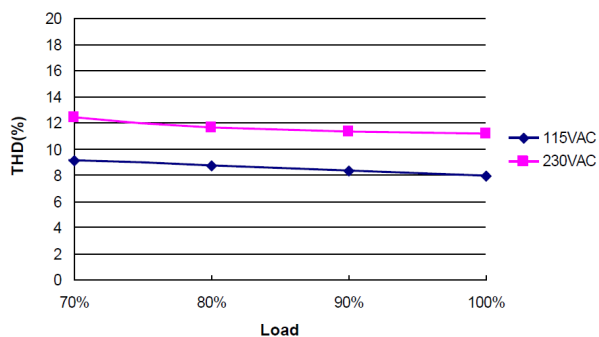


GLDP-240X368

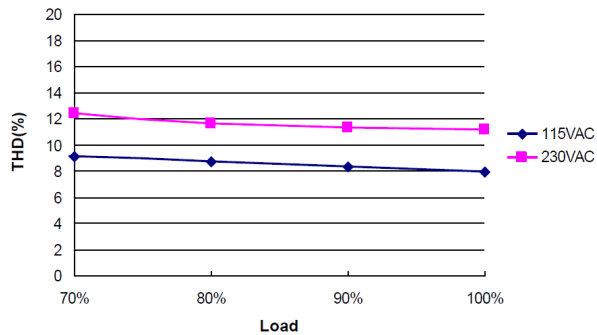


© Derating Curve

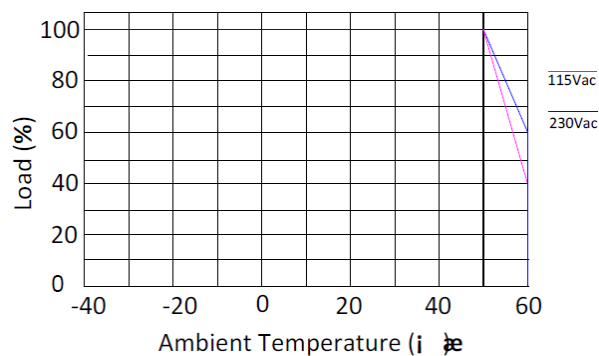

© P_O/P_{MAX} vs. U_{IN} Voltage

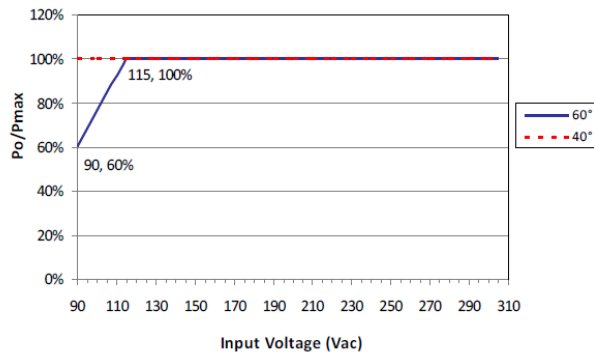

© Life vs. T_c curve

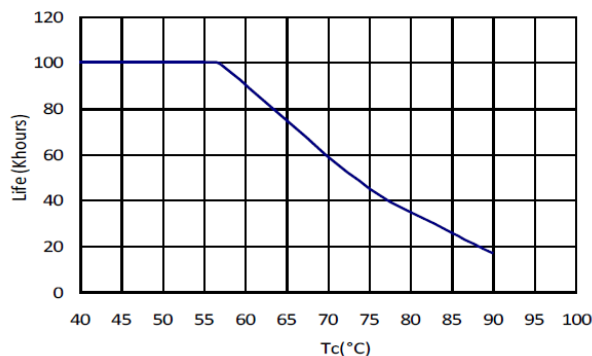


GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function



© DEFINE OF INTERFACE

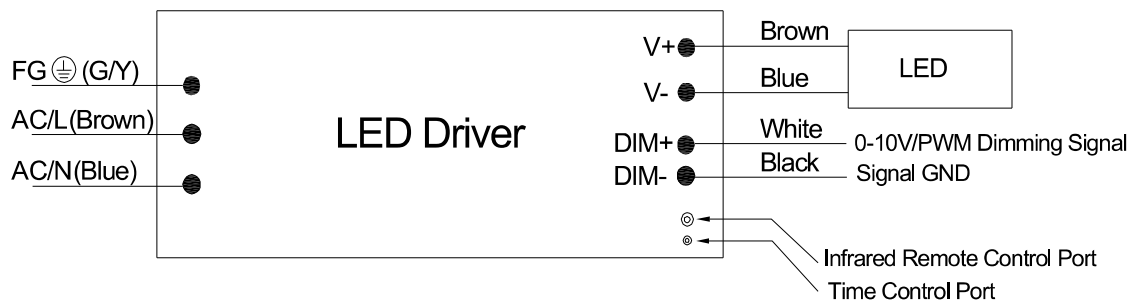

PWM Dimming


Frequency	250Hz ÷ 1kHz
High Voltage Level	9.7 ÷ 10.3V or 4.85 ÷ 5.15V
Low Voltage Level	0 ÷ 0.3V
Sink Current	< 2.0mA
Open Circuit of Dimming	100% output current
Linear Dimming Range	10% ÷ 100% Ir
Short Circuit of Dimming	10% Ir output current

0 – 10 Dimming

Dimming Signal Voltage	0 ÷ 10Vpp (±1%)
Sink Current	< 2.0mA
Open Circuit of Dimming	100% output current
Linear Dimming Range	10% ÷ 100% Ir
Short Circuit of Dimming	10% Ir output current

1. When connect external dimmer to LED driver, for the external driver, the maximum sink current should >70uA, maximum output current should >2mA..
2. Ir is maximum output current.
3. PWM dimming mode: detect outside PWM duty, change the output current depend the PWM duty, change the output current depending on proportion.
4. 0-10V dimming mode: detect outside voltage level of 0-10V dimming signal, change the output current depend the voltage level; change the output current depending on proportion
5. At two in one dimming mode, the maximum revolution definition is 1% at PWM mode, when voltage level of PWM is less than 10V, 99% duty is 100% Ir output, 100% duty is process as 0-10V dimming signal.
6. Can setting to 0-5V dimming by programmer.

© DIMMING CURVE

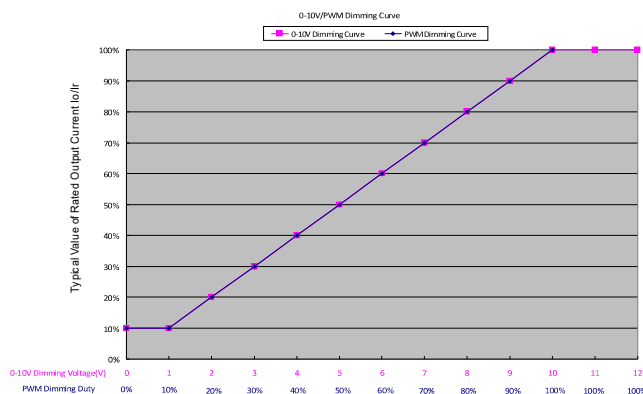


GLDP-240 series

240W Programmable Constant Power LED Driver with Dimming Function



© PROGRAMMING GUIDE

- Configure lout with IR controller.

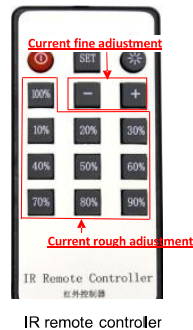


IR remote controller





Insert the signal terminal into the bigger hole at the driver output side

- Software and programming device.

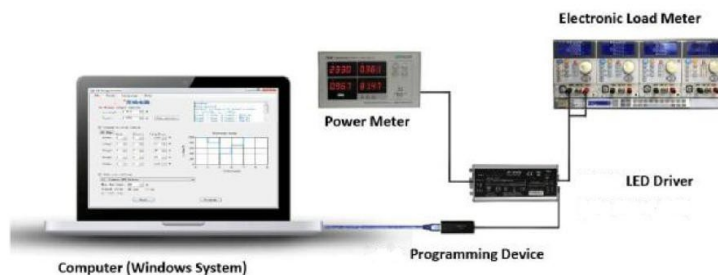

- Software for changing the dimming signal level or start-up model.

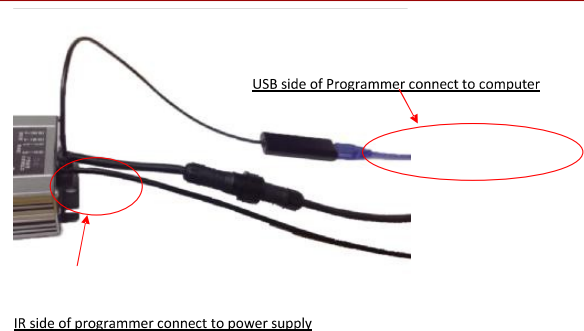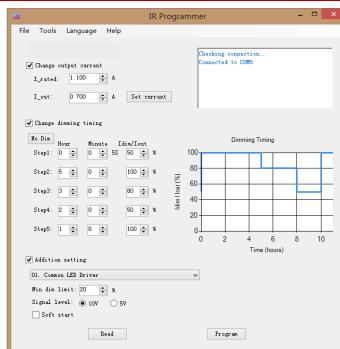

IR side of programmer connect to power supply