

AGV-12 series

12W Constant Voltage Power Supply



■ Features:

- Constant voltage design
- Universal AC input range
- Protections: Overload / Over voltage / Short circuit / Over Temperature
- Cooling by free air convection
 - Isolation class II
- Double insulation of Input and output wires
 - IP40 Protection level

tc: 90°C
ta: 40°C
CONSTANT VOLTAGE



⊙ ELECTRICAL SPECIFICATION

MODEL	AGV-12-12					
OUTPUT						
Rated Voltage	12V					
Rated Current	1A					
Current Range	0 ÷ 1A					
Rated Power	12W					
Line Regulation	± 1%					
Load Regulation	± 2%					
Tolerance [3]	± 3%					
Ripple & Noise (max.) [2]	120mV _{p-p}					
Setup, Rise Time [4]	3000ms, 15ms / 230VAC at full load					
Hold up Time (typ.)	30ms / 230VAC at full load					
INPUT						
Voltage Range	90 ÷ 264VAC; 127 ÷ 370VDC					
Frequency Range	47 ÷ 63Hz					
Efficiency (typ.)	79%					
AC Current (typ.)	0.28A / 115VAC, 0.15A / 230VAC					
Inrush Current (typ.)	13A / 230VAC; T _{WIDTH} (50% peak) = 132μs					
Max. No. Of PSU on Circuit Breaker	B10	B16	C10	C16	D10	D16
	46	73	60	96	60	96
Leakage Current (max.)	0.25mA / 240VAC					

AGV-12 series

12W Constant Voltage Power Supply



PROTECTIONS

Overload	Range: 110-150% rated power Type: hiccup mode, auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over Voltage	Range: 14-16V Type: hiccup mode, auto-recovery.
Over Temperature	140°C±10°C(detect on main control IC) Type: hiccup mode, auto-recovery.

WORKING ENVIRONMENT

Working Temperature	-10°C ÷ 70°C (refer to Derating Curve), ta: 40°C; tc: 90°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ 80°C, 10 ÷ 95% RH non-condensing

SAFETY and EMC REGULATIONS

Safety Standards	Compliance to EN 61347-1, EN 61347-2-13
Withstand Voltage	IN/OUT: 3kVAC
Isolation Resistance	IN/OUT: 100MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

DIMENSIONS	90 x 40 x 23.5mm (L x W x H)
Weight and Packing	88g; 150pcs./ctn; ctn weight and dimensions: 15kg; 41 x 27 x 27cm

EAN Code




1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

AGV-12 series


12W Constant Voltage Power Supply



© MECHANICAL SPECIFICATION

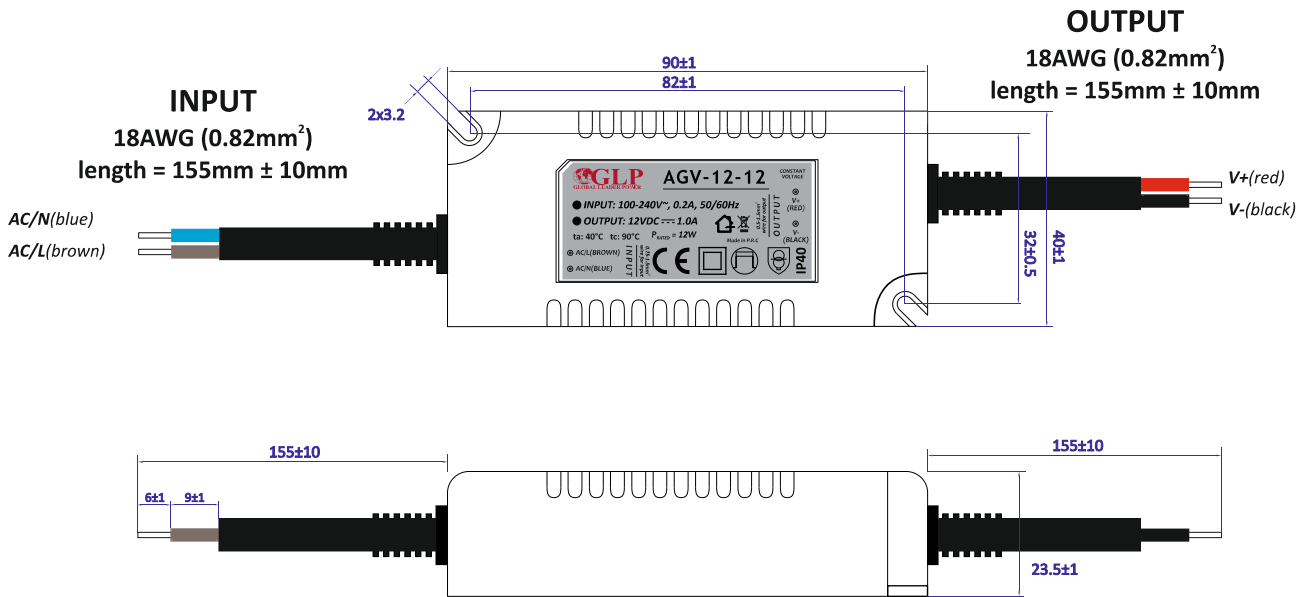

© DERATING CURVE

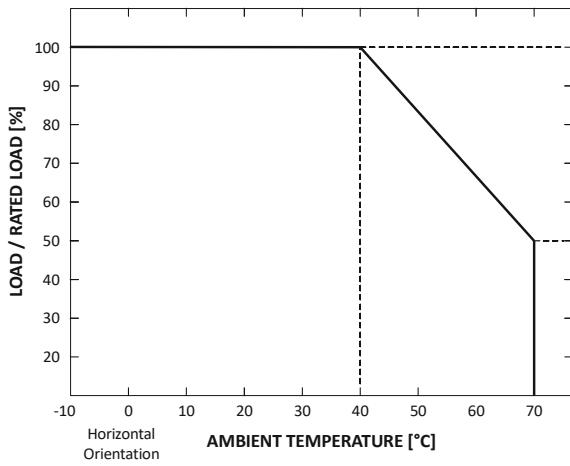

© STATIC CHARACTERISTIC

