

Product Features



- Universal input voltage: 90~305Vac;
- Constant power design
- (M types) offline programmable, (V types) output current adjustable by built-in potentiometer;
- 3-in-1 dimmable: 0~10V/ PWM/ Timer dimming.
Dim-to-off;
- Constant lumen output
- Output and Dimming Signal Isolating
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: SCP / OVP / OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

X6 LED drivers are developed for professional exterior lightings, with premium quality and advanced functionalities.

The X6-200W is a 200W offline programmable LED driver for outdoor LED lightings, which operates in constant current mode, with high efficiency, PF value, and 90~305Vac universal input voltage. Monitored by dimming cable with a USB programming device, the fully programmed driver offers all dimming, smart control, constant lumen output functionalities, and a wide range of output currents in one single driver. The unique design delivers maximum flexibilities with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be used for many different luminaire designs. X6 provides built-in timer dimming schedules, to further increase the energy savings and CO2 reductions achieved with LED lighting. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enable the driver to operate with high reliability, and extending product lifetime. Overall protection is provided against the lightning surge, output overvoltage, short circuit, and over temperature, to ensure an extremely low failure rate.

MODELS


Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Voltage Adjustable Range (V)	Full Power Current Adjustable Range (A)	Default Output Current Setting(A)	Typical Efficiency [2]	Power Factor
							230Vac
X6-200X041	200	20-41	30-41	4.88-6.67	5.56	91%	0.97
X6-200X062	200	38-62	40-62	3.23-5.00	4.90	92%	0.97
X6-200X096	200	48-96	67-96	2.10-3.00	2.80	93%	0.97
X6-200X143	200	70-143	95-143	1.40-2.10	1.40	93%	0.97
X6-200X191	200	96-191	133-191	1.05-1.50	1.05	93.5%	0.97
X6-200X286	200	143-286	191-286	0.70-1.05	0.70	93.5%	0.97

Notes:

[1]. X can be M or V, X=M means dimmable and offline programmable. The adjustable lout range: 10%-100% I_{max}, X=V means non-dimmable and output current adjusted by built-in potentiometer.

[2]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

OPERATING AREA I-V

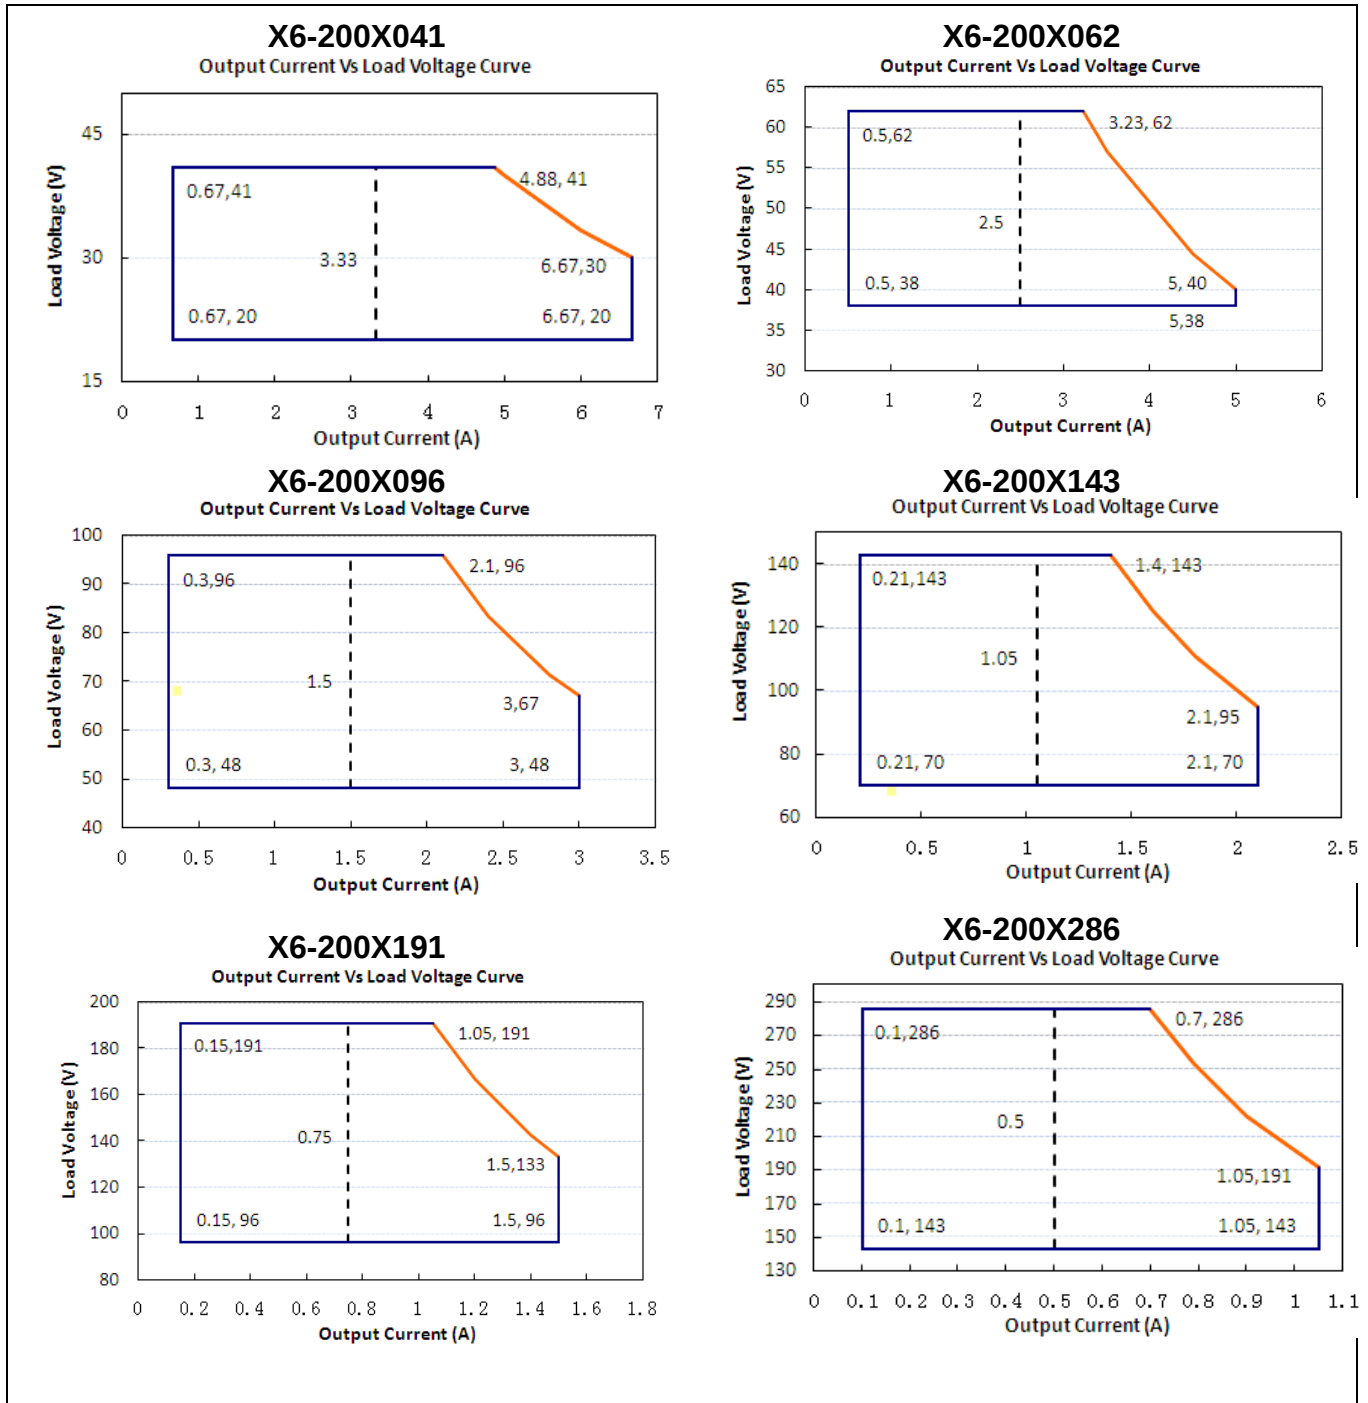

Notes: X=V is suitable for the right area of the dotted line; X=M is suitable for the solid line contain area.

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90Vac	100-277Vac	305Vac	
Input Frequency	47Hz	50/60	63Hz	
Leakage Current	-	-	0.70mA	277Vac/60Hz
Input AC Current	-	-	2.8A	100-277Vac & full load
Inrush Current	-	-	75A	230Vac & full load
Standby Power Consumption			3W	
Power Factor	0.97	0.99	-	115Vac, 50-60Hz, full load
	0.95	0.97		230Vac, 50-60Hz, full load
	0.9	0.92		277Vac, 50-60Hz, full load
THD	-	5%	10%	100-240Vac, 50-60Hz, 70%-100% load
	-	-	20%	277Vac, 50-60Hz, 70%-100% load

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Iset	-	5%Iset	
Output Current Setting Range (A)				The 'M type' adjustable lout range: 10%-100% I _{max} ,
X6-200X041	3.30		6.67	
X6-200X062	2.50		5.00	
X6-200X096	1.50	-	3.00	
X6-200X143	1.05		2.10	
X6-200X191	0.75		1.50	
X6-200X286	0.53		1.05	
Output Current Setting Range with Constant Power				
X6-200X041	4.88		6.67	
X6-200X062	3.23		5.00	
X6-200X096	2.10	-	3.00	
X6-200X143	1.40		2.10	
X6-200X191	1.05		1.50	
X6-200X286	0.70		1.05	
Total Output Current Ripple(pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	100~277Vac & 100% Load, load is LED
No Load Output Voltage	-	-		

X6-200X041			50	
X6-200X062			70	
X6-200X096			110	
X6-200X143			170	
X6-200X191			200	
X6-200X286			310	
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	1S	2S	115Vac, 100% load
	-	0.5S	1S	230Vac, 100% load

GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @115Vac				
X6-200X041				
I _o =4.88	88%	90%		
I _o =6.67	88%	90%		
X6-200X062				
I _o =3.23	88%	90%		
I _o =5.00	88%	90%		
X6-200X096				
I _o =2.10	88%	90%		
I _o =3.00	88%	90%		
X6-200X143				
I _o =0.70	89%	90%		
I _o =1.05	89%	90%		
X6-200X191				
I _o =1.05	89%	91%		
I _o =1.5	89%	91%		
X6-200X286				
I _o =0.70	89%	91%		
I _o =1.05	89%	91%		
Efficiency @230Vac				
X6-200X041				
I _o =4.88	90%	92%		
I _o =6.67	90%	92%		
X6-200X062				
I _o =3.23	91%	93%		
I _o =5.00	91%	93%		
X6-200X096				
I _o =2.10	91%	93%		
I _o =3.00	91%	93%		
X6-200X143				
I _o =0.70	91%	93%		
I _o =1.05	91%	93%		
X6-200X191				
I _o =1.05	91%	93%		
I _o =1.5	91%	93%		
X6-200X286				
I _o =0.70	91%	93%		
I _o =1.05	91%	93%		

I _o =0.70 I _o =1.05		91%	93%		
Efficiency @277Vac X6-200X041 I _o =4.88 I _o =6.67 X6-200X062 I _o =3.23 I _o =5.00 X6-200X096 I _o =2.10 I _o =3.00 X6-200X143 I _o =0.70 I _o =1.05 X6-200X191 I _o =1.05 I _o =1.5 X6-200X286 I _o =0.70 I _o =1.05		90.5% 90.5% 91.5% 91.5% 91.5% 91.5% 91.5% 91.5% 91.5% 91.5% 91.5% 91.5%	92.5% 92.5% 93.5% 93.5% 93.5% 93.5% 93.5% 93.5% 93.5% 93.5% 93.5% 93.5%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	Max 5mA/60S
	Input-PE	-	1600Vac	-	
	Output-PE	-	1600Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance		50MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF		-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
Lifetime		-	50000Hrs	-	230Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Ambient Temperature		-40°C		+60°C	230Vac&100% load
Operating Case Temperature for Safety T _{c_s}		-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_s}		-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 95% RH
Storage Temperature		-40°C	-	+85°C	Humidity: 5% to 100% RH
Dimensions (LxWxH)mm		L193.6*W68*H39			
Net Weight		1200±100g/PCS			
Package		L500mm*W310mm*H160mm; 10PCS/Ctn, Gross Weight: 8Kg			

DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	10V	-	
0~10V Source Current on Vdim(+)Pin		-	0.1mA	0.2mA	
Dimming Output Range	X6-200M041	10% I _{max}	-	100% I _{max}	I _{max} =6.67A I _{max} =5.00A

	X6-200M062 X6-200M096 X6-200M143 X6-200M191 X6-200M286				$I_{max}=3.00A$ $I_{max}=2.10A$ $I_{max}=1.50A$ $I_{max}=1.05A$
	X6-200M041 X6-200M062 X6-200M096 X6-200M143 X6-200M191 X6-200M286	0.67 0.50 0.30 0.21 0.15 0.11	-	6.67 5.00 3.00 2.10 1.50 1.05	
Recommended Dimming Range for 0-10V		0V	-	10V	Default 0-10V/ PWM Dimming(0-10V,0-9V,0-5V,0-3.3V can be customized as request)
PWM_in High Level		9.7V	-	10.3V	
PWM_in Low Level		0V	-	0.3V	
PWM_in Frequency Range		200Hz		2000Hz	
PWM_in Duty Cycle		1%	-	99%	

SAFTY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	√
		AS/NZS 61347.1	√

EMC COMPLIANCE


EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	

NOTE:


This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on

the luminaire itself.


INRUSH CURRENT WAVEFORM

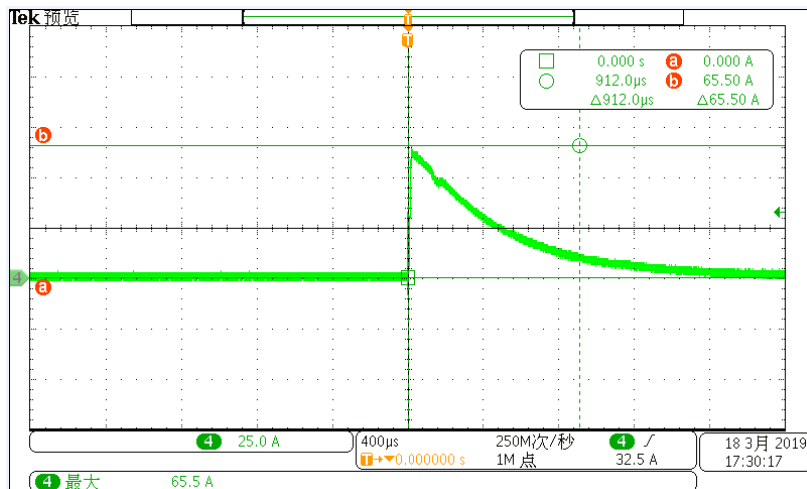


DERATING CURVE

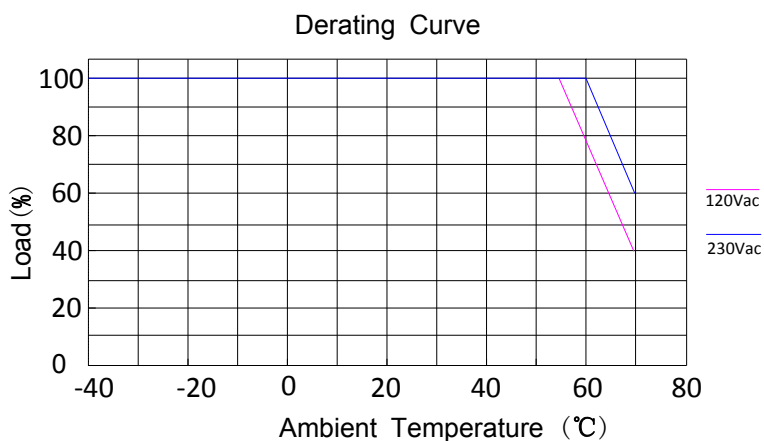


OUTPUT POWER VS INPUT VOLTAGE

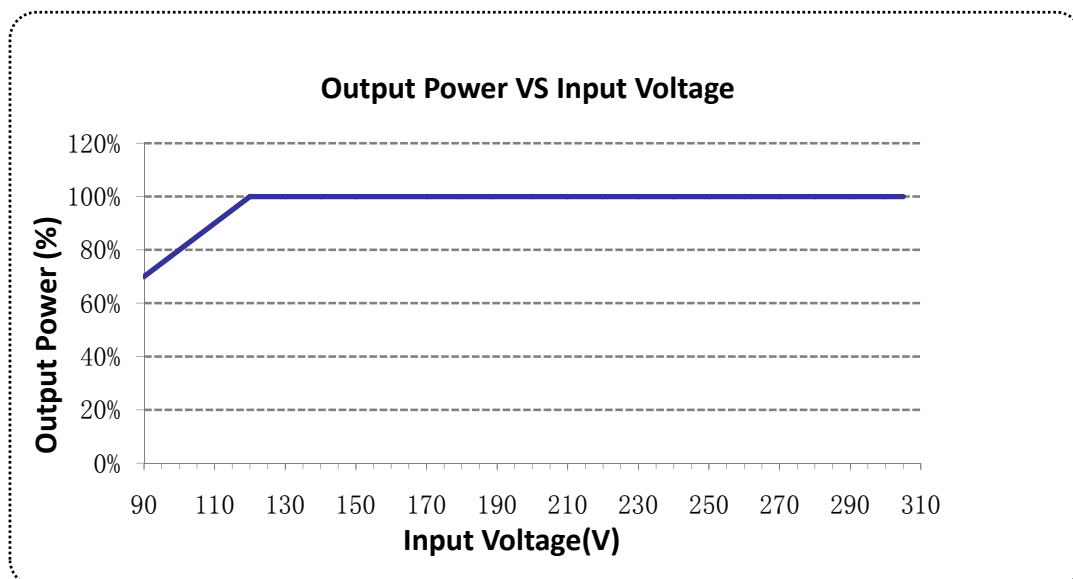


LIFETIME VS CASE TEMPERATURE

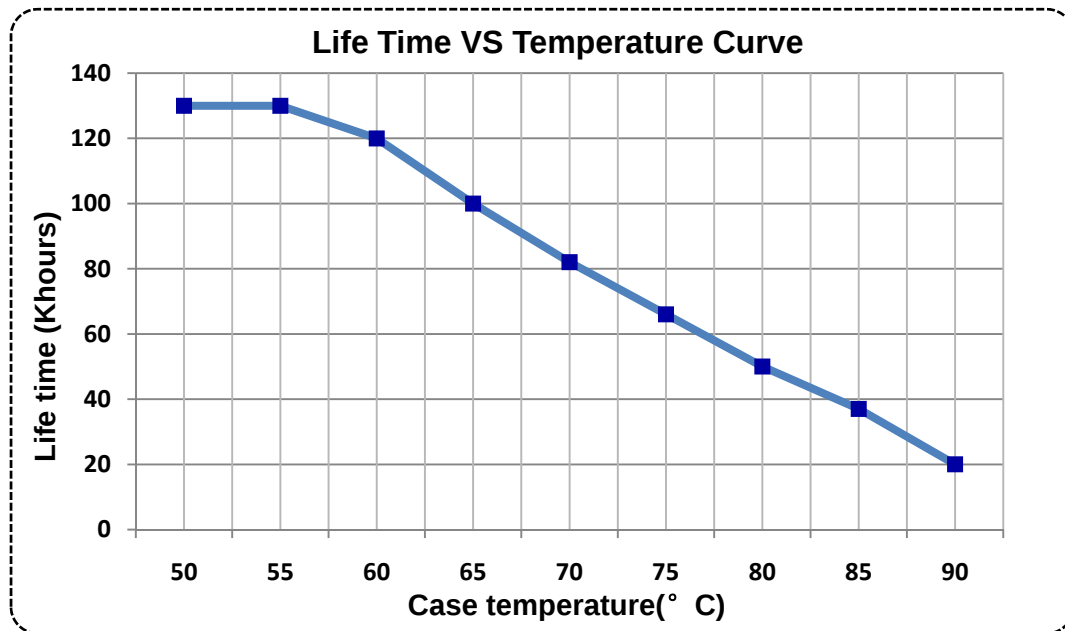


EFFICIENCY VS LOAD

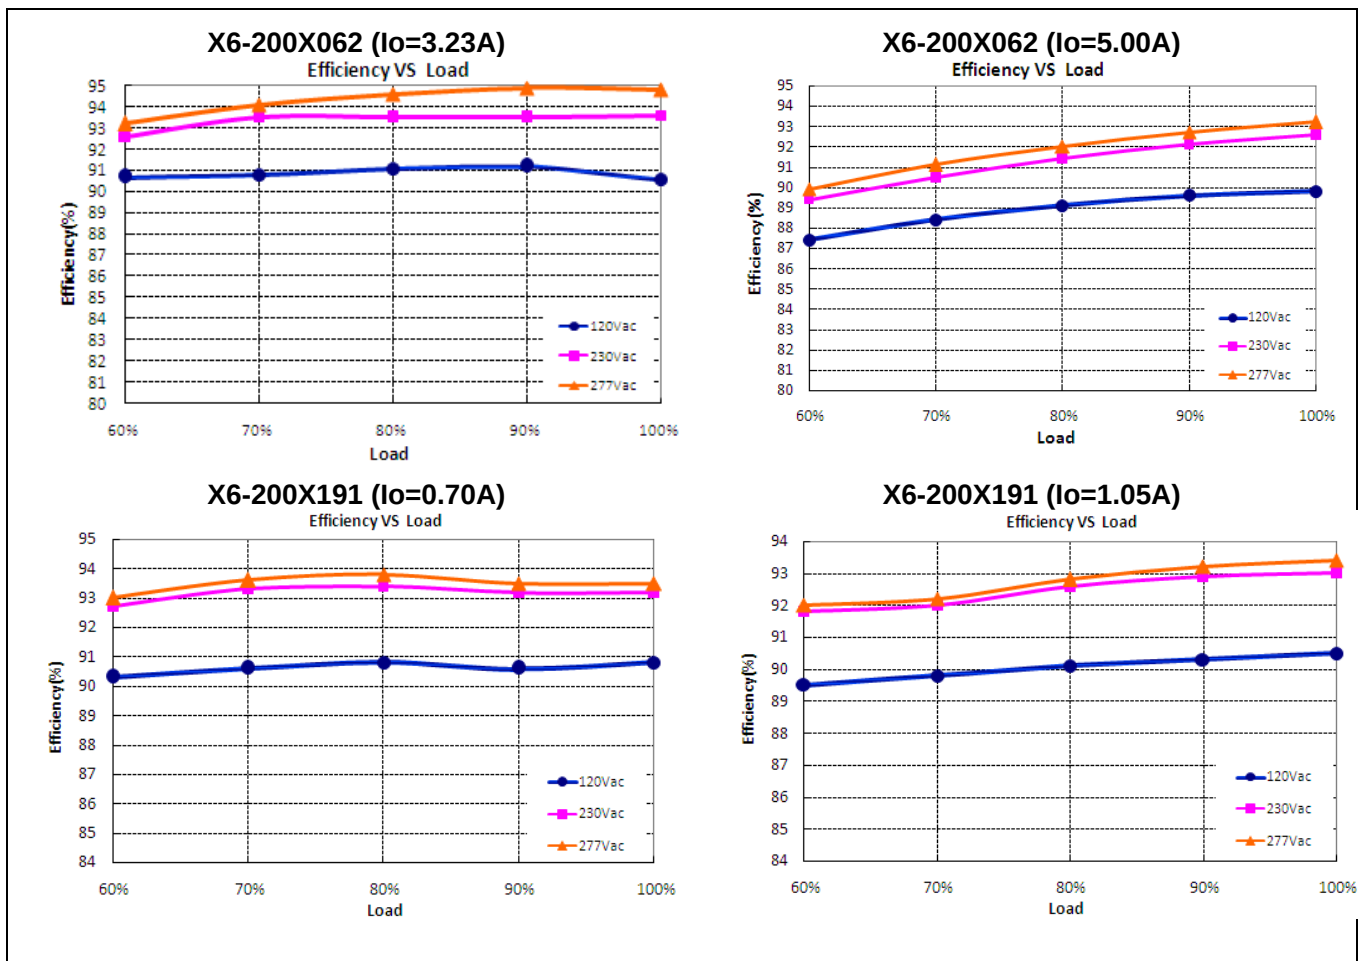

POWER FACTOR VS LOAD

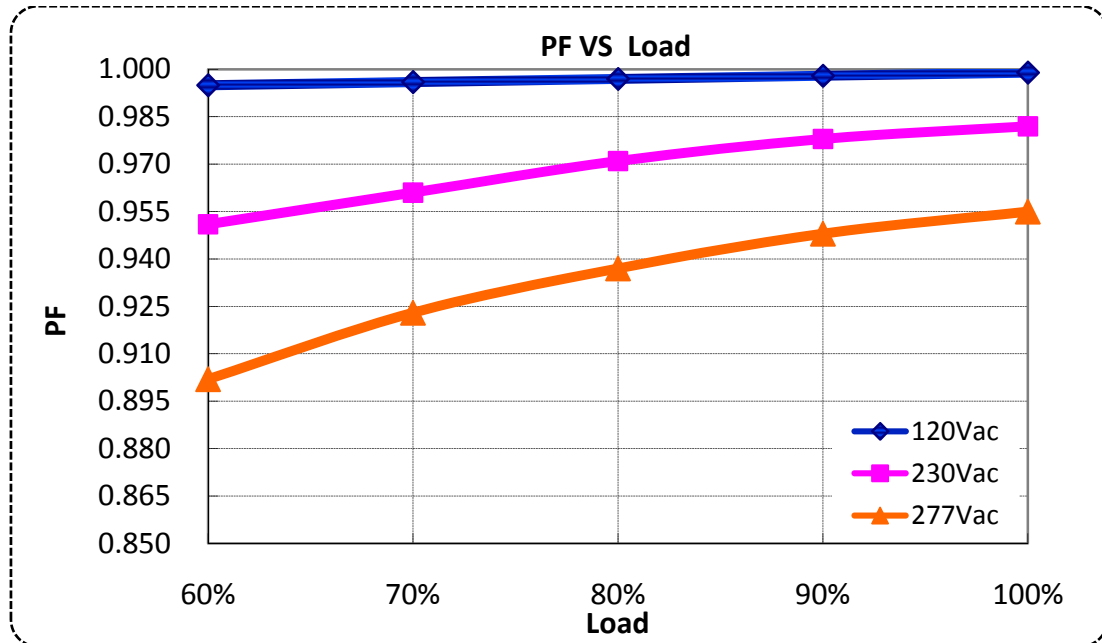


TOTAL HARMONIC DISTORTION

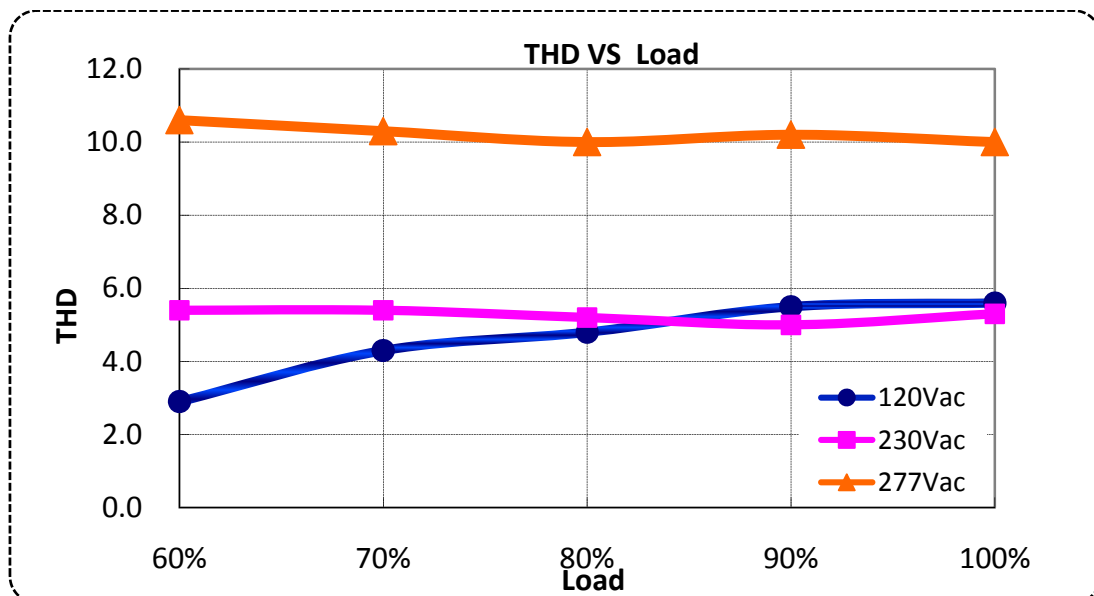

PROTECTIONS


Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed. The max derating could be 30% (typ.).
Short Circuit Protection	Hiccup mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Run into protection model when output voltage exceeds limit, and return to normal when the fault

0-10V/PWM DIMMING

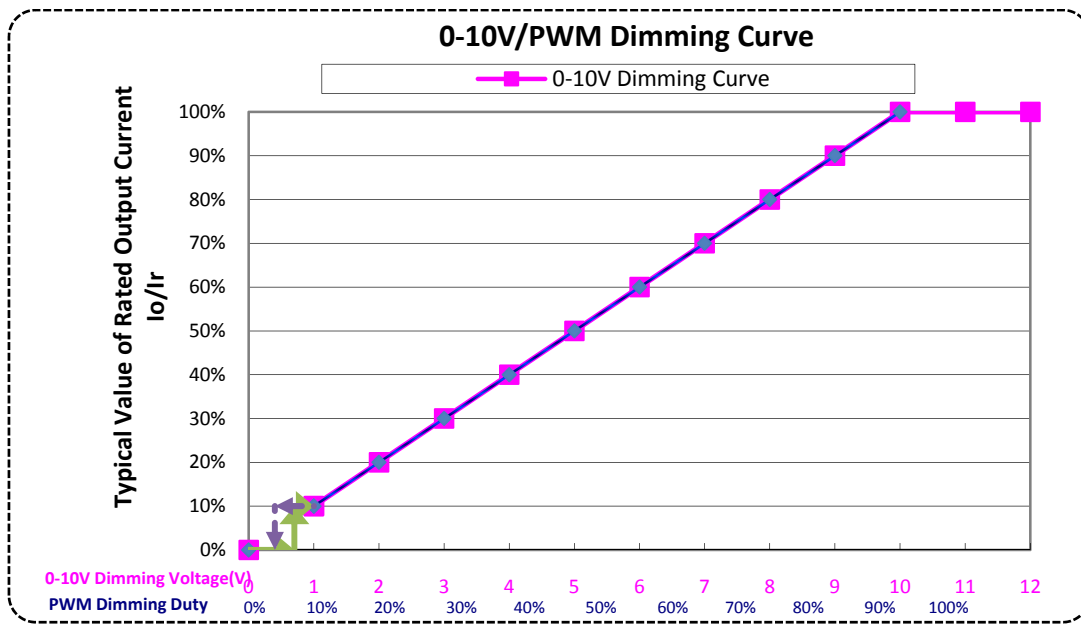


MECHANICAL OUTLINE

X6-200M types

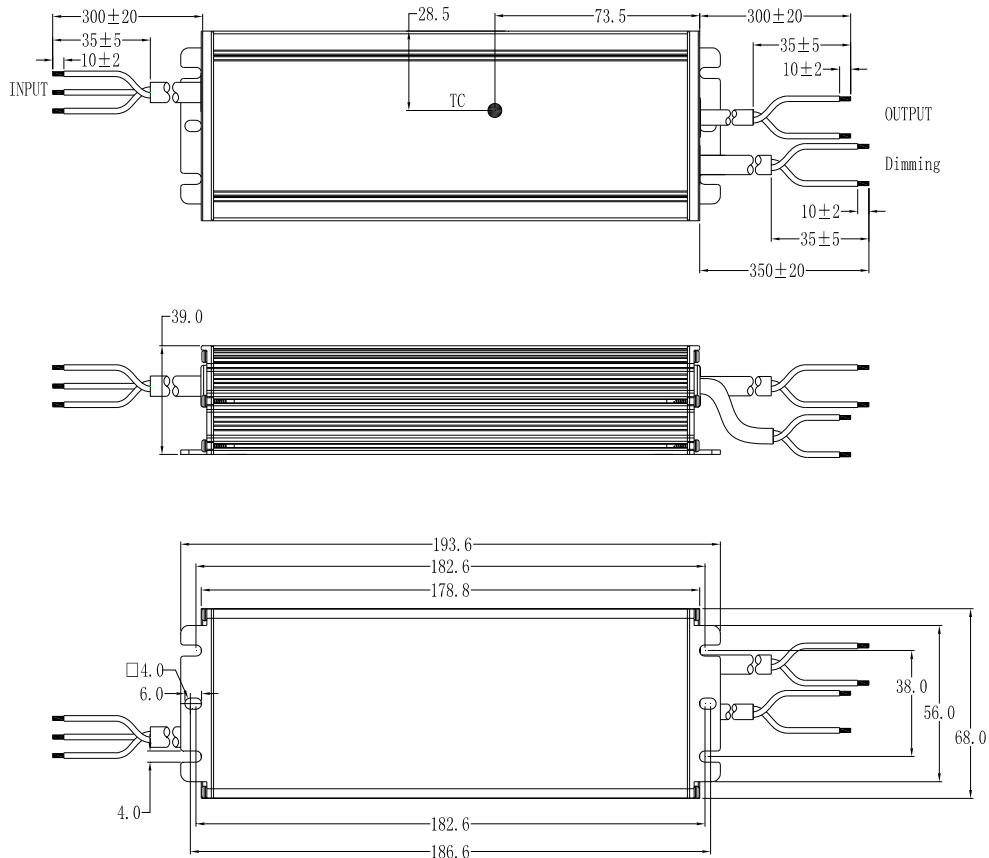

X6-200V types

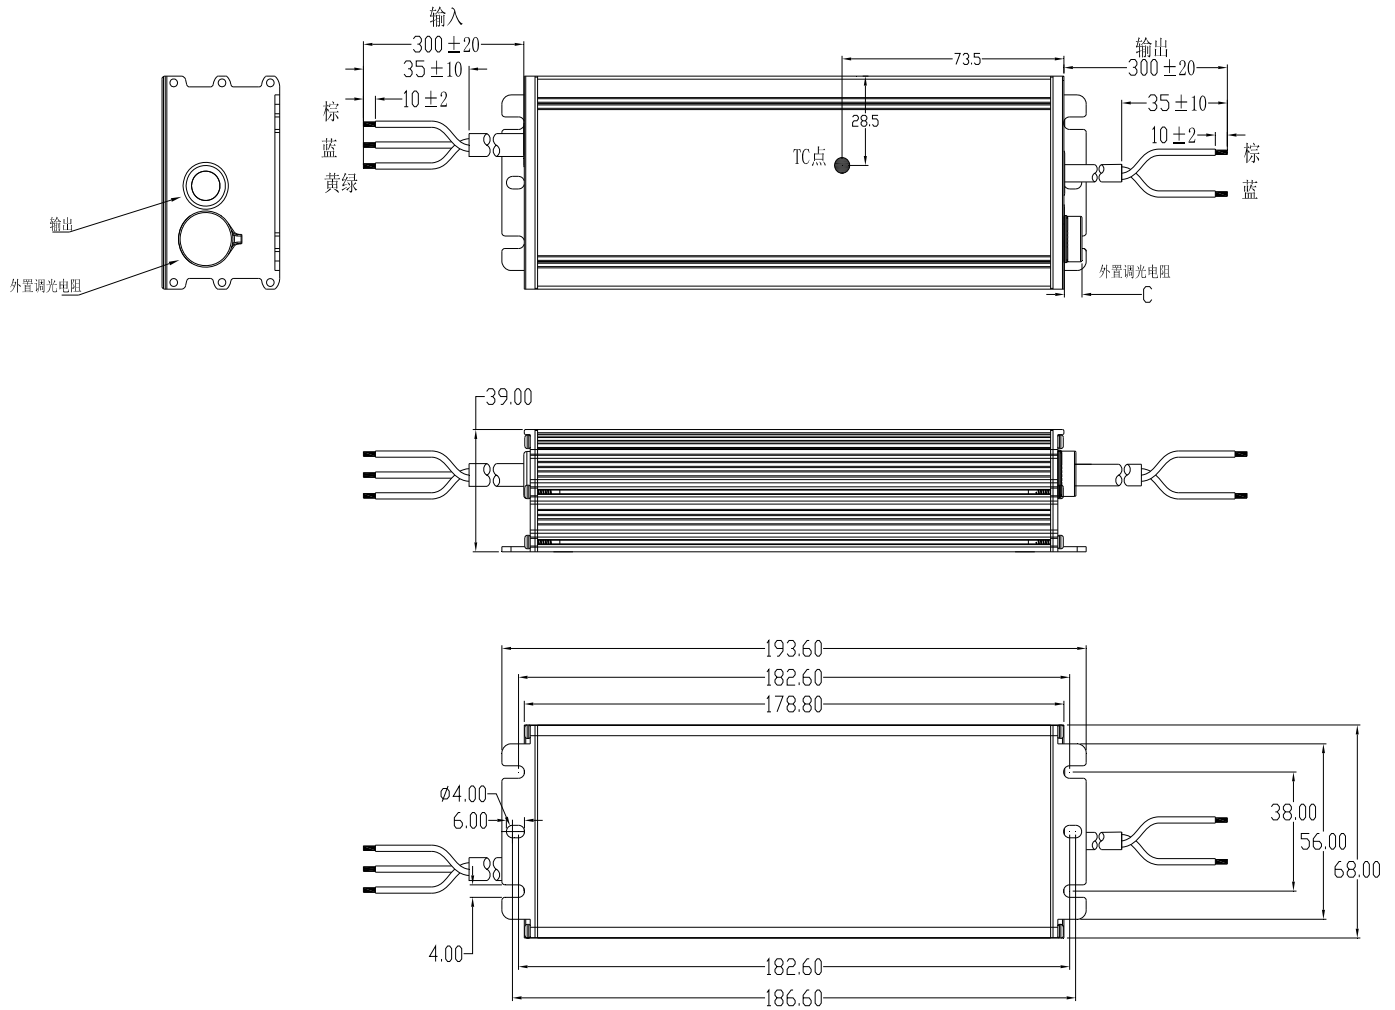

Wire	Specification	Note
Input	CCC+VDE H05RN-F 3*1.0mm ² external diameter: 7.3mm L=300±10mm, peel length 35mm, Tin-dip length 10mm	for CCC/CE
	18AWG*3C SJOW external diameter: 7.8mm L=300±10mm, peel length 35mm, Tin-dip length 10mm	for UL
Output	CCC+VDE H05RN-F 2*1.0mm ² external diameter: 7.0mm L=300±10mm, peel length 35mm, Tin-dip 10mm	for CCC/CE
	18AWG*2C SJOW external diameter: 7.3mm L=300±10mm, peel length 35mm, Tin-dip 10mm	for UL
Dimming	UL2733 22AWG*2C external diameter: 5.45mm L=350±10mm, peel length 35mm, Tin-dip 10mm	X = M

REVISION HISTORY

Version	Description of Change		Date	Notes
	Before	Now		
A.1	—	Datasheets Release	2019-03-16	