

### Product Features



- Universal input voltage / Full range: 90~305Vac;
- Constant power design, output current programming adjustable;
- (M types) offline programmable, (V types) output current adjustable by built-in potentiometer;
- 3-in-1 dimmable: 0~10Vdc, PWM, Timer dimming. Dim-to-off;
- (M types) Constant lumen output;
- Output and Dimming Signal Isolating;
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: SCP, OVP, OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

### Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

### DESCRIPTION

The X6-240W series is 240W outdoor offline programmable LED driver that operates in constant current with high PF value and universal input voltage range 90~305Vac model. Offline Monitored by dimming cable connected with an USB kit programming device, the fully programmed drivers offer all dimming, dim-to-off, constant lumen output options and a wide range of output current in a single driver, which deliver maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. X6 provides built-in timer dimming schedules further increasing the energy savings and CO<sub>2</sub> reductions achieved with LED lighting. It also helps clients to improve the management of logistics and stock. The compact metal case and high efficiency enables the driver to operating with high reliability, and extending product lifetime. Overall protection is provided against lightening surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.

### MODELS


| Model Number [1] | Max Output Power (W) | Output Voltage Range (Vdc) | Full Power Output Voltage Range (Vdc) | Full Power Current Adjustable Range (A) [2] | Default Output Current Setting(A) | Typical Efficiency [3] | PF   |
|------------------|----------------------|----------------------------|---------------------------------------|---------------------------------------------|-----------------------------------|------------------------|------|
| X6-240Y041       | 240                  | 20-41                      | 32-41                                 | 5.86-7.50                                   | 6.70                              | 92%                    | 0.97 |
| X6-240Y062       | 240                  | 38-62                      | 42-62                                 | 3.88-5.71                                   | 5.00                              | 92%                    | 0.97 |
| X6-240Y171       | 240                  | 85-171                     | 114-171                               | 1.40-2.10                                   | 1.40                              | 93%                    | 0.97 |
| X6-240Y229       | 240                  | 114-229                    | 160-229                               | 1.05-1.50                                   | 1.05                              | 93%                    | 0.97 |
| X6-240Y343       | 240                  | 171-343                    | 228-343                               | 0.70-1.05                                   | 0.70                              | 93.5%                  | 0.97 |

### Notes:


- [1]. Y can be M or V. Y=M means dimmable and offline programmable. The adjustable lout range: 10%-100% I<sub>max</sub>;  
Y=V means non-dimmable and output current adjusted by built-in potentiometer.
- [2]. Output current adjustable range with constant power at max output power;
- [3]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

### OPERATING AREA I-V


**X6-240Y041**

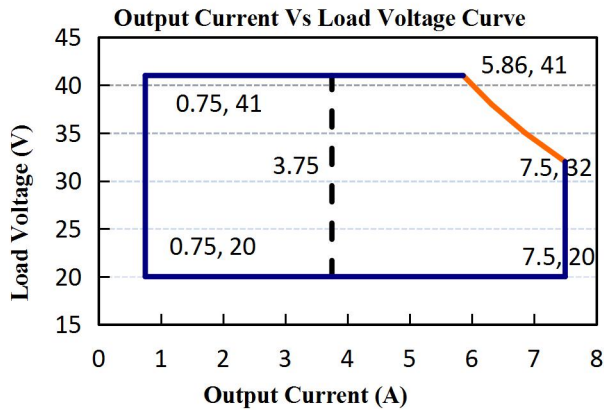


**X6-240Y062**

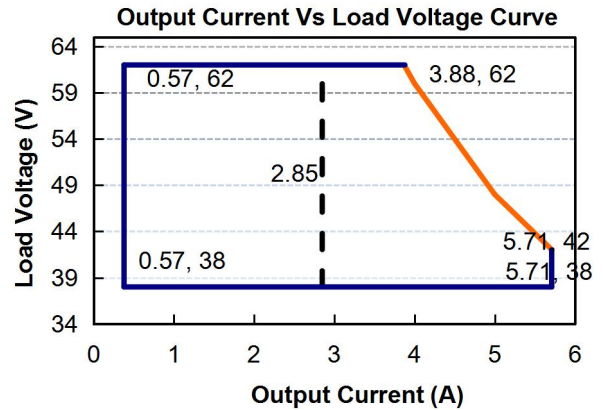


**X6-240Y171**

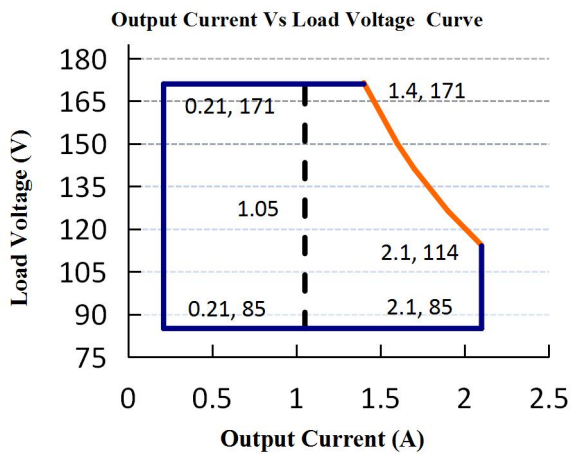

**X6-240Y229**

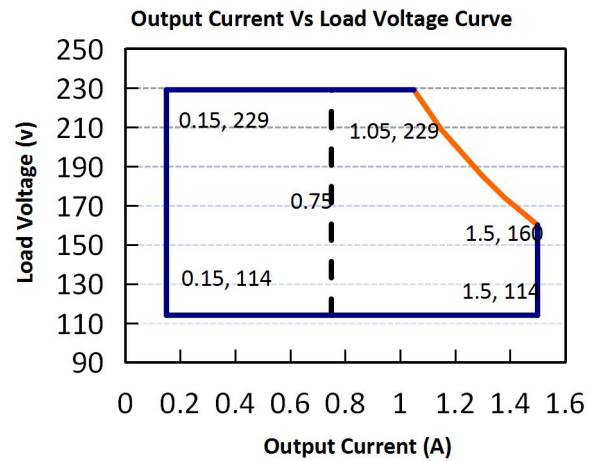

**X6-240Y343**

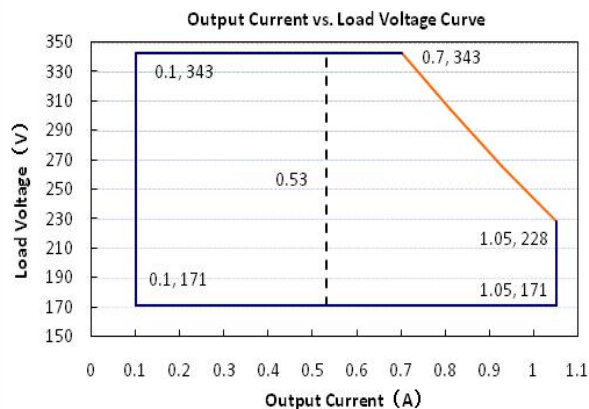

Notes: Y=V is suitable for the right area of the dotted line; Y=M is suitable for the solid line contain area.

## INPUT SPECIFICATIONS

| Parameter                 | Min.  | Typ.       | Max.   | Notes                              |
|---------------------------|-------|------------|--------|------------------------------------|
| Input Voltage             | 90Vac | 100-277Vac | 305Vac |                                    |
| Input Frequency           | 47Hz  | 50/60      | 63Hz   |                                    |
| Leakage Current           | -     | -          | 0.70mA | 277Vac/60Hz                        |
| Input AC Current          | -     | -          | 3.3A   | 100-277Vac & full load             |
| Inrush Current            | -     | -          | 75A    | 230Vac & full load                 |
| Standby Power Consumption |       |            | 2W     | Dim to off                         |
| Power Factor              | 0.97  | 0.99       | -      | 115Vac, 50-60Hz, full load         |
|                           | 0.95  | 0.97       |        | 230Vac, 50-60Hz, full load         |
|                           | 0.92  | 0.95       |        | 277Vac, 50-60Hz, full load         |
| THD                       | -     | 5%         | 10%    | 100-240Vac, 50-60Hz, 50%-100% load |
|                           | -     | -          | 15%    | 277Vac, 50-60Hz, 70%-100% load     |

## OUTPUT SPECIFICATIONS

| Parameter                                        | Min.  | Typ. | Max. | Notes                                                                                       |
|--------------------------------------------------|-------|------|------|---------------------------------------------------------------------------------------------|
| Output Current Tolerance                         | -5%   | -    | 5%   |                                                                                             |
| Output Current Setting Range (A)                 |       |      |      | The 'M type' adjustable lout range:<br>10%-100% I <sub>max</sub> ,                          |
| X6-240Y041                                       | 3.75  |      | 7.5  |                                                                                             |
| X6-240Y062                                       | 2.85  |      | 5.71 |                                                                                             |
| X6-240Y171                                       | 1.05  | -    | 2.1  |                                                                                             |
| X6-240Y229                                       | 0.75  |      | 1.5  |                                                                                             |
| X6-240Y343                                       | 0.525 |      | 1.05 |                                                                                             |
| Output Current Setting Range with Constant Power |       |      |      |                                                                                             |
| X6-240Y041                                       | 5.86  |      | 7.5  |                                                                                             |
| X6-240Y062                                       | 3.88  |      | 5.71 |                                                                                             |
| X6-240Y171                                       | 1.4   | -    | 2.1  |                                                                                             |
| X6-240Y229                                       | 1.05  |      | 1.5  |                                                                                             |
| X6-240Y343                                       | 0.70  |      | 1.05 |                                                                                             |
| Total Output Current Ripple(pk-pk)               | -     | 5%   | 10%  | 20MHz BW, full load& LED load, the ripple would be tiny different under different LED load. |
| Startup Overshoot Current                        | -     | -    | 10%  | 120~277Vac & 100% Load, load is LED                                                         |
| No Load Output Voltage                           |       |      |      |                                                                                             |
| X6-240Y041                                       |       |      | 50   |                                                                                             |
| X6-240Y062                                       | -     | -    | 70   |                                                                                             |
| X6-240Y171                                       |       |      | 190  |                                                                                             |

|                    |     |    |      |                                                                                     |
|--------------------|-----|----|------|-------------------------------------------------------------------------------------|
| X6-240Y229         |     |    | 250  |                                                                                     |
| X6-240Y343         |     |    | 360  |                                                                                     |
| Line Regulation    | -1% | -  | 1%   | 25°C±10°C ambient temperature, input voltage changes from 100Vac to 277Vac.         |
| Load Regulation    | -3% | -  | 3%   | 25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%. |
| Turn-on Delay Time | -   | 1S | 2S   | 115Vac, 100% load                                                                   |
|                    | -   |    | 0.5S | 230Vac, 100% load                                                                   |

## GENERAL SPECIFICATIONS

| Parameter                                                                                                                                                                                                                                                                                                                                        | Min.                                                                       | Typ.                                                                   | Max. | Notes                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------|------|----------------------------------------------------|
| Efficiency @115Vac<br>X6-240Y041<br>I <sub>o</sub> =5.86A<br>I <sub>o</sub> =7.50A<br>X6-240Y062<br>I <sub>o</sub> =3.88A<br>I <sub>o</sub> =5.71A<br>X6-240Y171<br>I <sub>o</sub> =1.4 A<br>I <sub>o</sub> =2.1A<br>X6-240Y229<br>I <sub>o</sub> =1.05A<br>I <sub>o</sub> =1.5A<br>X6-240Y343<br>I <sub>o</sub> =0.70A<br>I <sub>o</sub> =1.05A | 88%<br>88%<br>88%<br>88%<br>89%<br>89%<br>88%<br>89%<br>89%<br>89%<br>89%  | 90%<br>90%<br>90%<br>90%<br>91%<br>91%<br>90%<br>91%<br>91%<br>91%     |      | Measured at full load and 25°C ambient temperature |
| Efficiency @230Vac<br>I <sub>o</sub> =5.86A<br>I <sub>o</sub> =7.50A<br>X6-240Y062<br>I <sub>o</sub> =3.88A<br>I <sub>o</sub> =5.71A<br>X6-240Y171<br>I <sub>o</sub> =1.4 A<br>I <sub>o</sub> =2.1A<br>X6-240Y229<br>I <sub>o</sub> =1.05A<br>I <sub>o</sub> =1.5A<br>X6-240Y343<br>I <sub>o</sub> =0.70A<br>I <sub>o</sub> =1.05A               | 90%<br>90%<br>91%<br>91%<br>91%<br>91%<br>91.5%<br>91.5%<br>91.5%<br>91.5% | 92%<br>92%<br>92%<br>92%<br>93%<br>93%<br>93%<br>93%<br>93.5%<br>93.5% |      | Measured at full load and 25°C ambient temperature |
| Efficiency @277Vac<br>I <sub>o</sub> =5.86A<br>I <sub>o</sub> =7.50A<br>X6-240Y062<br>I <sub>o</sub> =3.88A<br>I <sub>o</sub> =5.71A<br>X6-240Y171<br>I <sub>o</sub> =1.4 A<br>I <sub>o</sub> =2.1A<br>X6-240Y229<br>I <sub>o</sub> =1.05A<br>I <sub>o</sub> =1.5A<br>X6-240Y343<br>I <sub>o</sub> =0.70A<br>I <sub>o</sub> =1.05A               | 90.5%<br>90.5%<br>92%<br>92%<br>92%<br>92%<br>92%<br>92%<br>92%            | 92.5%<br>92.5%<br>93%<br>93%<br>93.5%<br>94%<br>93.5%<br>94%<br>94%    |      | Measured at full load and 25°C ambient temperature |

|                                              |              |                                                     |           |       |                                                                              |
|----------------------------------------------|--------------|-----------------------------------------------------|-----------|-------|------------------------------------------------------------------------------|
| Dielectric Strength                          | Input-Output | -                                                   | 3750Vac   | -     | Max 5mA/60S                                                                  |
|                                              | Input-PE     | -                                                   | 1600Vac   | -     |                                                                              |
|                                              | Output-PE    | -                                                   | 1600Vac   | -     |                                                                              |
| Grounding Resistance                         |              | -                                                   | -         | 0.1Ω  | 25A/60S, under 25°C±10°C ambient temperature                                 |
| Insulation Resistance                        |              | 50MΩ                                                | -         | -     | Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH                     |
| MTBF                                         |              | -                                                   | 200000Hrs | -     | 25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)              |
| Lifetime                                     |              | -                                                   | 50000Hrs  | -     | 230Vac&100% load, 75°C case temperature, refer to lifetime curve for details |
| Ambient Temperature                          |              | -40°C                                               |           | +60°C | 230Vac&100% load                                                             |
| Operating Case Temperature for Safety Tc_s   |              | -40°C                                               | -         | +90°C |                                                                              |
| Operating Case Temperature for Warranty Tc_s |              | -40°C                                               | -         | +75°C | 5 years warranty case temperature Humidity: 10% to 95% RH                    |
| Storage Temperature                          |              | -40°C                                               | -         | +85°C | Humidity: 5% to 100% RH                                                      |
| Dimensions (L*W*H)mm                         |              | L208.6*W68*H39mm                                    |           |       |                                                                              |
| Net Weight                                   |              | 1100±100g/PCS                                       |           |       |                                                                              |
| Package                                      |              | L500mm*W370mm*H160mm; 10PCS/Ctn, Gross Weight: 12kg |           |       |                                                                              |

## DIMMING

| Parameter                                          |                                                                    | Min.                                  | Typ.  | Max.                                 | Notes                                                                                                                               |
|----------------------------------------------------|--------------------------------------------------------------------|---------------------------------------|-------|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| 0~10V Absolute Maximum Voltage on the Vdim (+) Pin |                                                                    | -                                     | 10V   | -                                    |                                                                                                                                     |
| 0~10V Source Current on Vdim(+)Pin                 |                                                                    | -                                     | 200uA | 400uA                                |                                                                                                                                     |
| Dimming Output Range                               | X6-240M041<br>X6-240M062<br>X6-240M171<br>X6-240M229<br>X6-240M343 | 10% I <sub>max</sub>                  | -     | 100% I <sub>max</sub>                | I <sub>max</sub> =7.50A<br>I <sub>max</sub> =5.71A<br>I <sub>max</sub> =2.10A<br>I <sub>max</sub> =1.50A<br>I <sub>max</sub> =1.05A |
|                                                    | X6-240M041<br>X6-240M062<br>X6-240M171<br>X6-240M229<br>X6-240M343 | 0.75<br>0.57<br>0.21<br>0.15<br>0.105 | -     | 7.50<br>5.71<br>2.10<br>1.50<br>1.05 |                                                                                                                                     |
| Recommended Dimming Range for 0-10V                |                                                                    | 0V                                    | -     | 10V                                  | Default 0-10V/ PWM<br>Dimming(0-10V,0-9V,0-5V,0-3.3V<br>can be customized as request)                                               |
| PWM_in High Level                                  |                                                                    | 9.7V                                  | -     | 10.3V                                |                                                                                                                                     |
| PWM_in Low Level                                   |                                                                    | 0V                                    | -     | 0.3V                                 |                                                                                                                                     |
| PWM_in Frequency Range                             |                                                                    | 300Hz                                 |       | 2000Hz                               |                                                                                                                                     |
| PWM_in Duty Cycle                                  |                                                                    | 1%                                    | -     | 99%                                  |                                                                                                                                     |

## SAFTY STANDARDS

| Safety Category | Country / Territory | Standards               | Approved |
|-----------------|---------------------|-------------------------|----------|
| CCC             | China               | GB19510.1, GB19510.14   | √        |
| CE              | Europe              | EN61347-1, EN61347-2-13 | √        |
|                 |                     | EN62493                 | √        |

|      |              |                           |   |
|------|--------------|---------------------------|---|
| ENEC |              | EN62384                   | √ |
| CB   | CB Countries | IEC61347-1, IEC61347-2-13 | √ |
| BIS  | India        | IS 15885(PART 2/SEC 13)   | √ |
| UL   | USA          | UL 8750                   | √ |
| CUL  | Canada       | CSA C22.2 No.250.13       | √ |
| KC   | South Korea  | K61347-1, K61347-2-13     |   |
| PSE  | Japan        | J61347-1, J61347-2-13     |   |
| SAA  | Australia    | AS/NZS IEC 61347.2.13     |   |
|      |              | AS/NZS 61347.1            |   |


### EMC COMPLIANCE

| EMC Category | Country / Territory | Standards                  | Approved |
|--------------|---------------------|----------------------------|----------|
| CCC          | China               | GB/T 17743, GB 17625.1     | √        |
| CE           | Europe              | EN 55015                   | √        |
|              |                     | EN 61000-3-2, EN 61000-3-3 | √        |
|              |                     | EN61000-4-2,3,4,5,6,11     | √        |
|              |                     | EN 61547                   | √        |
| KC           | South Korea         | K61547                     |          |
|              |                     | K00015                     |          |
| PSE          | Japan               | J55015                     |          |
| FCC          | USA                 | FCC part 15                |          |


### NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


### INRUSH CURRENT WAVEFORM

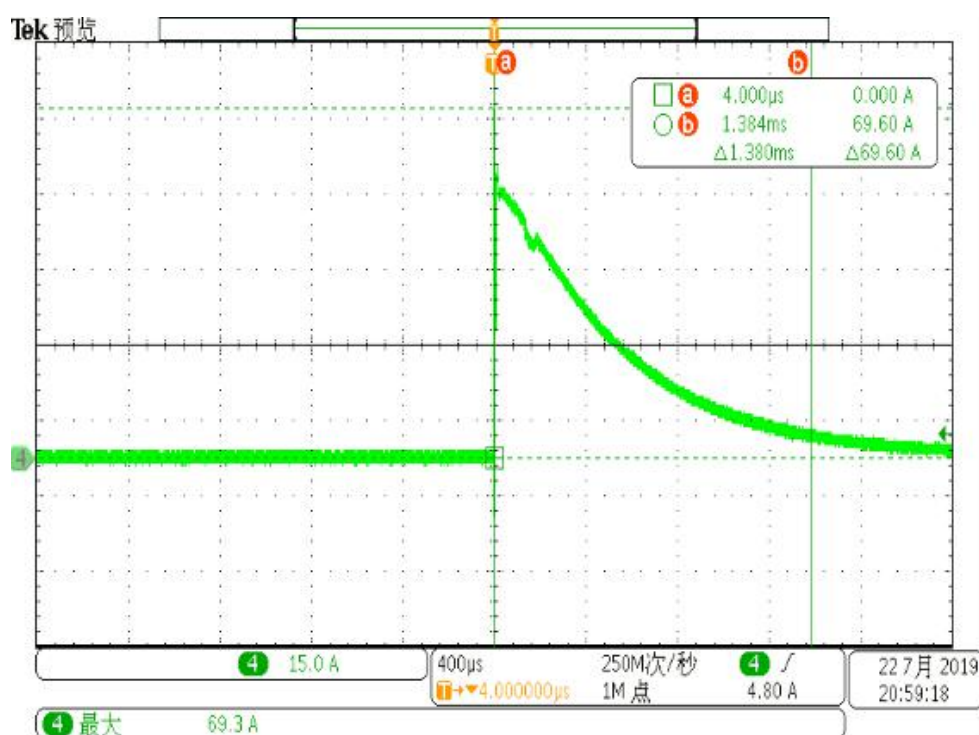

### DERATING CURVE

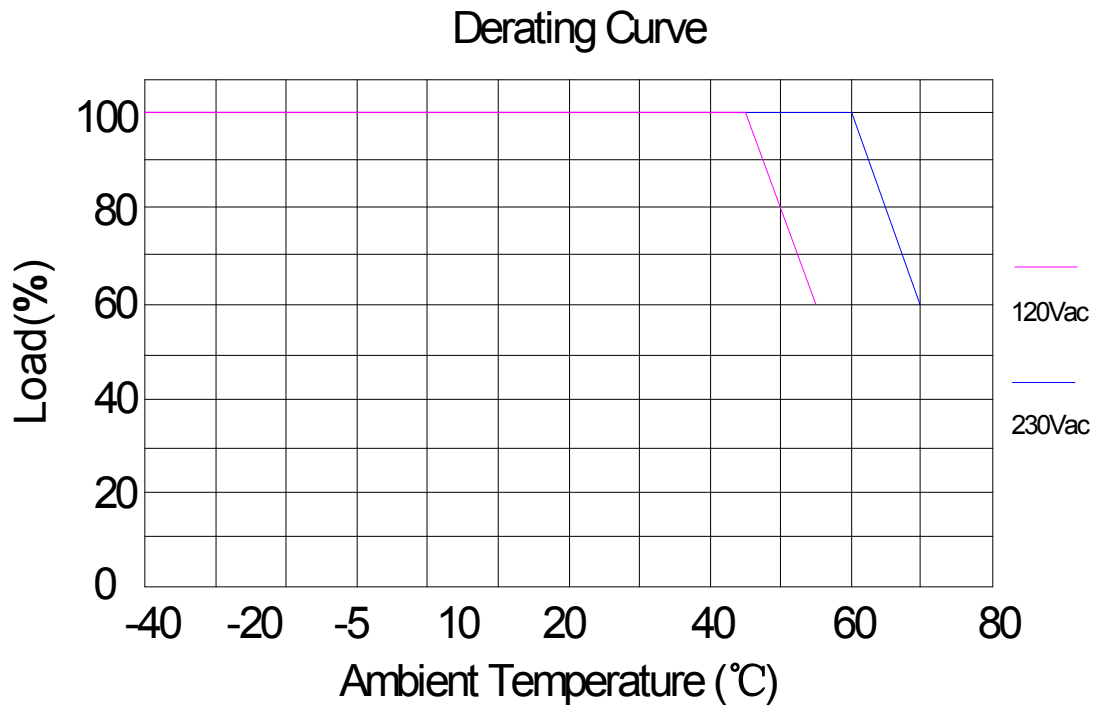


### OUTPUT POWER VS INPUT VOLTAGE

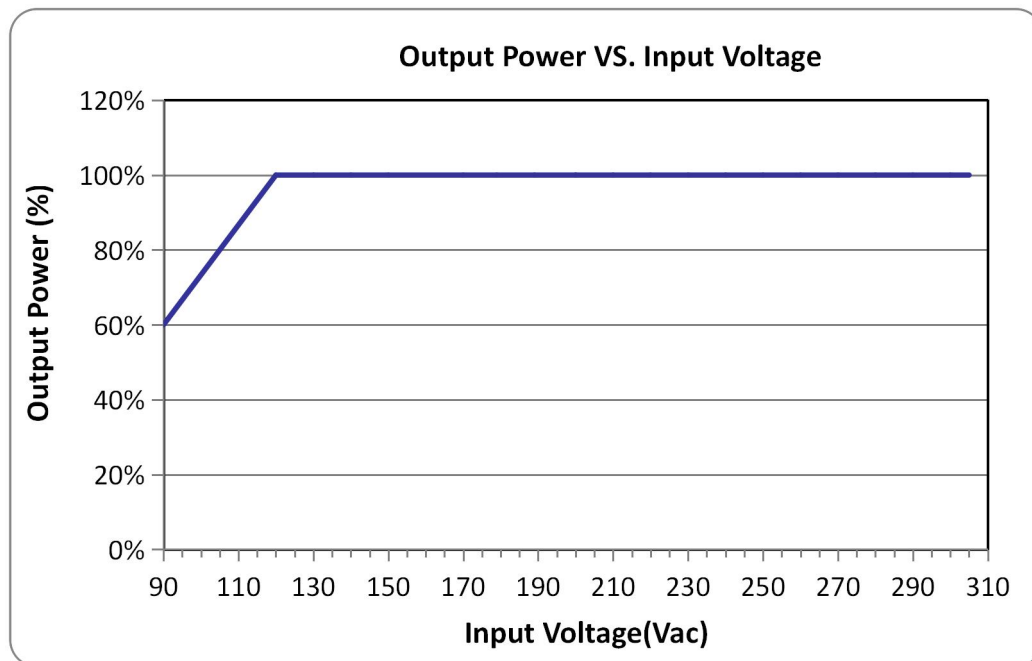










### LIFETIME VS CASE TEMPERATURE

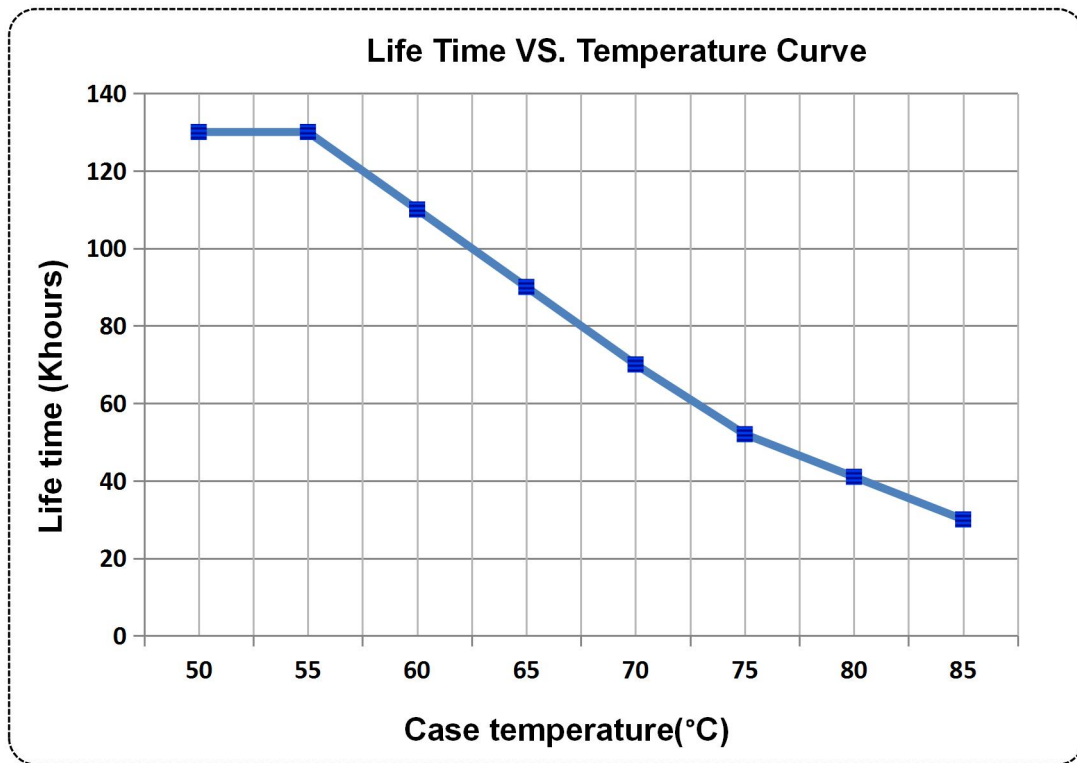


### EFFICIENCY VS LOAD

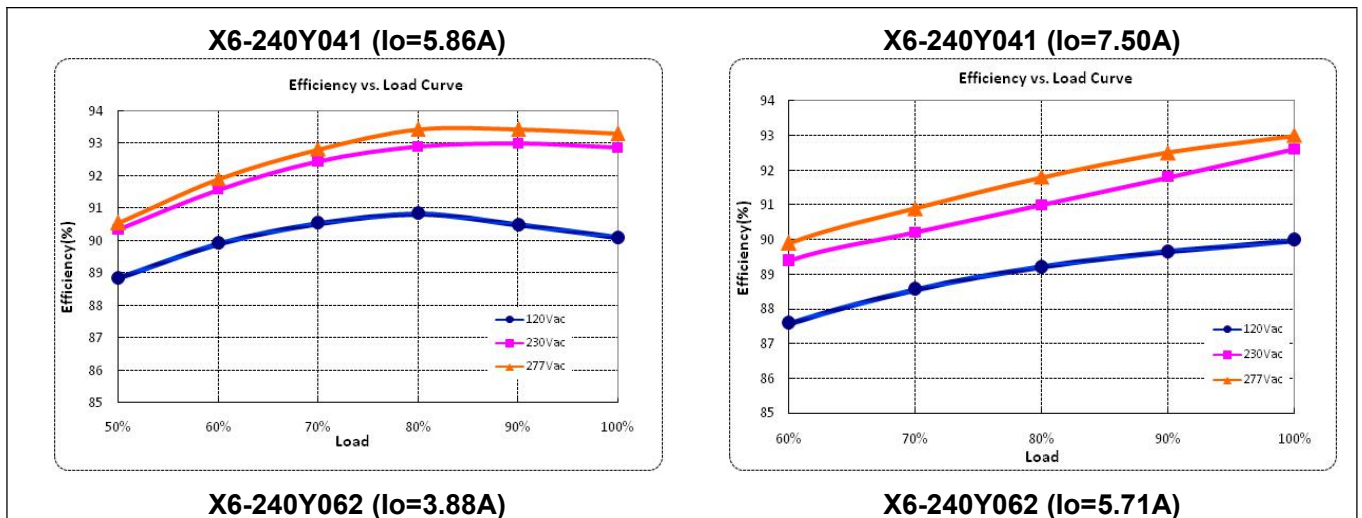




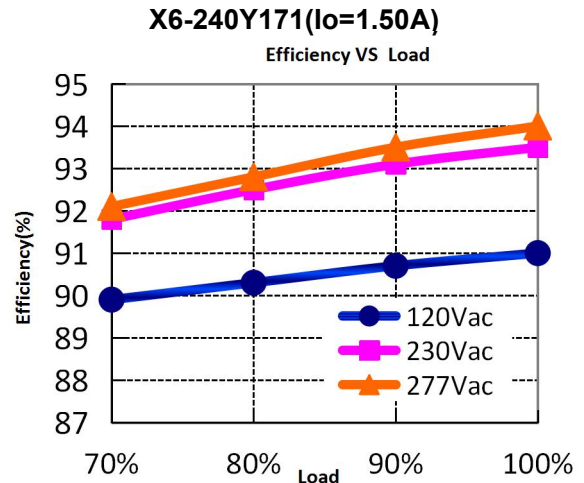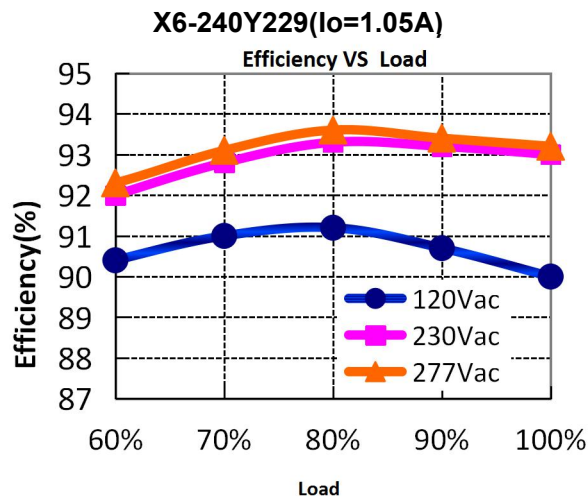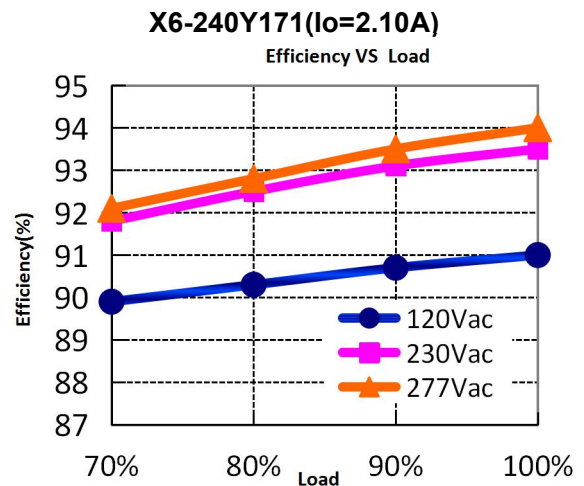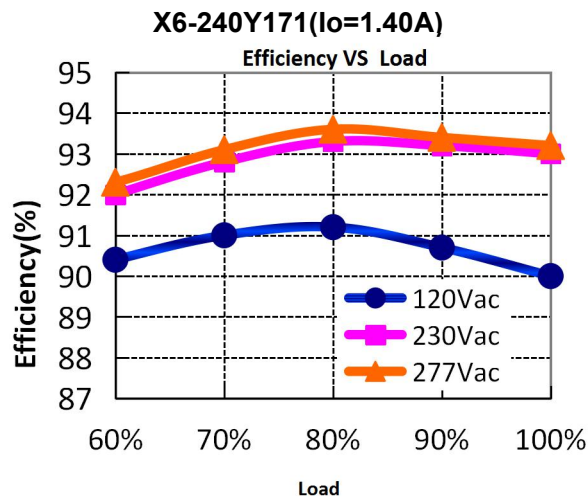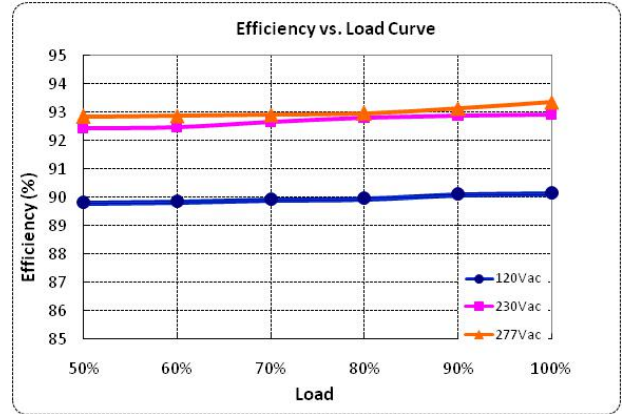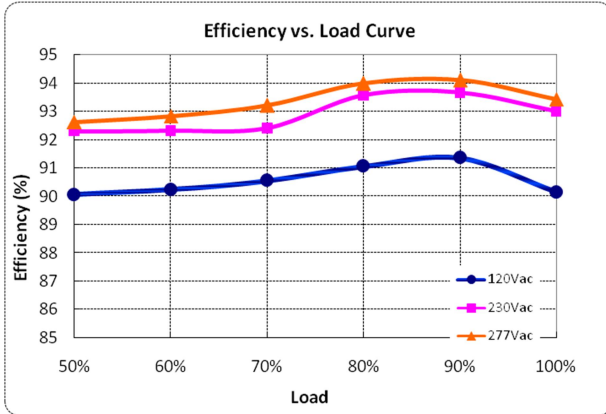


**X6-240Y343 (Io=0.70A)**

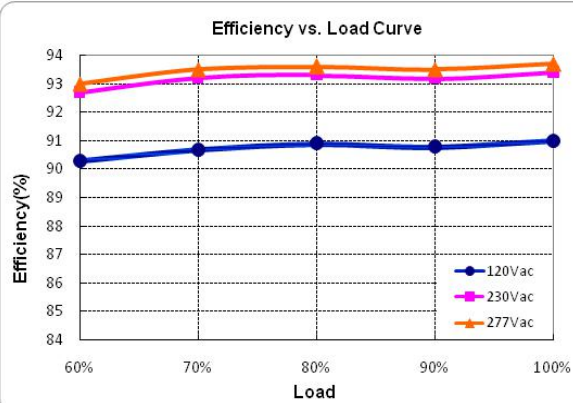


**X6-240Y343 (Io=1.05A)**

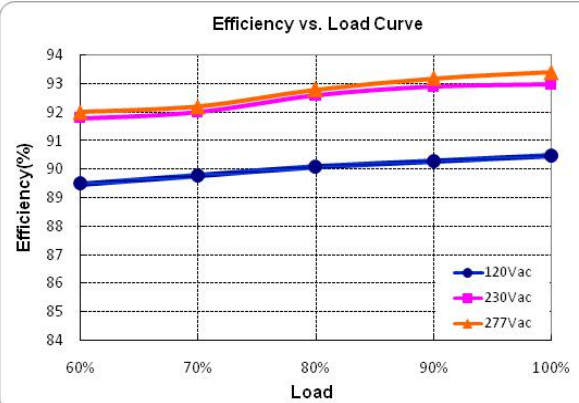

### POWER FACTOR VS LOAD

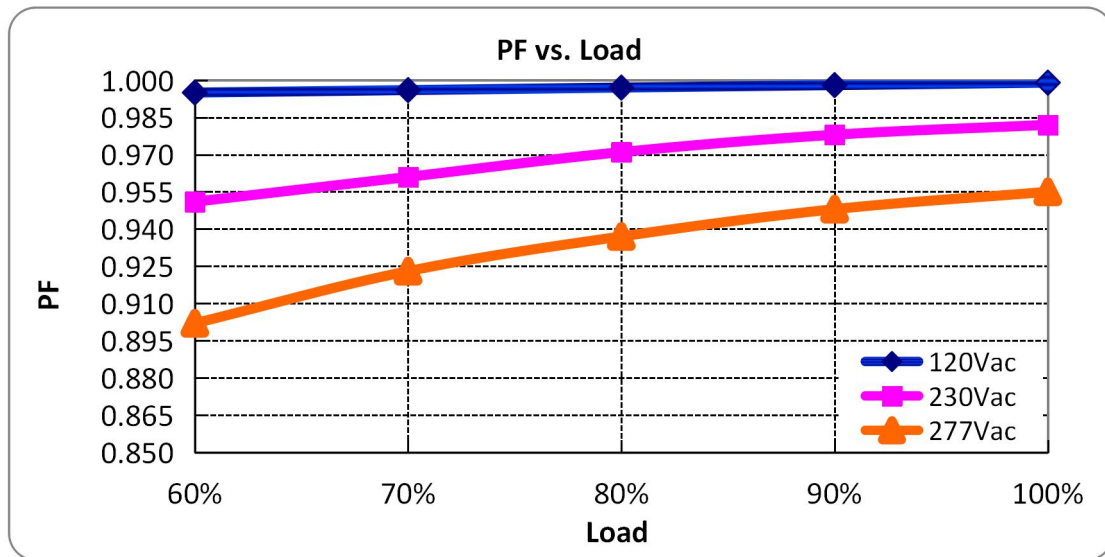


### TOTAL HARMONIC DISTORTION

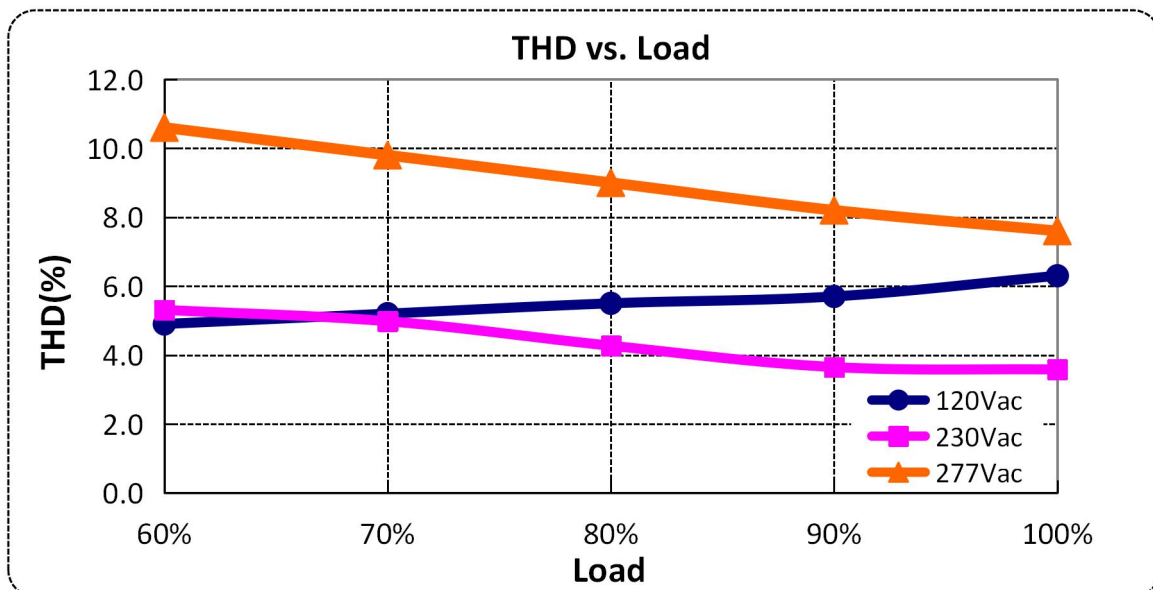

### PROTECTIONS

| Parameter                   | Notes                                                                                                                                                                    |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Over Temperature Protection | Decreases output current, returning to normal after over temperature is removed.                                                                                         |
| Short Circuit Protection    | Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed. |
| Over Voltage Protection     | Run into protection model when output voltage exceeds limit, and return to normal when the fault.                                                                        |

### 0-10V/PWM DIMMING

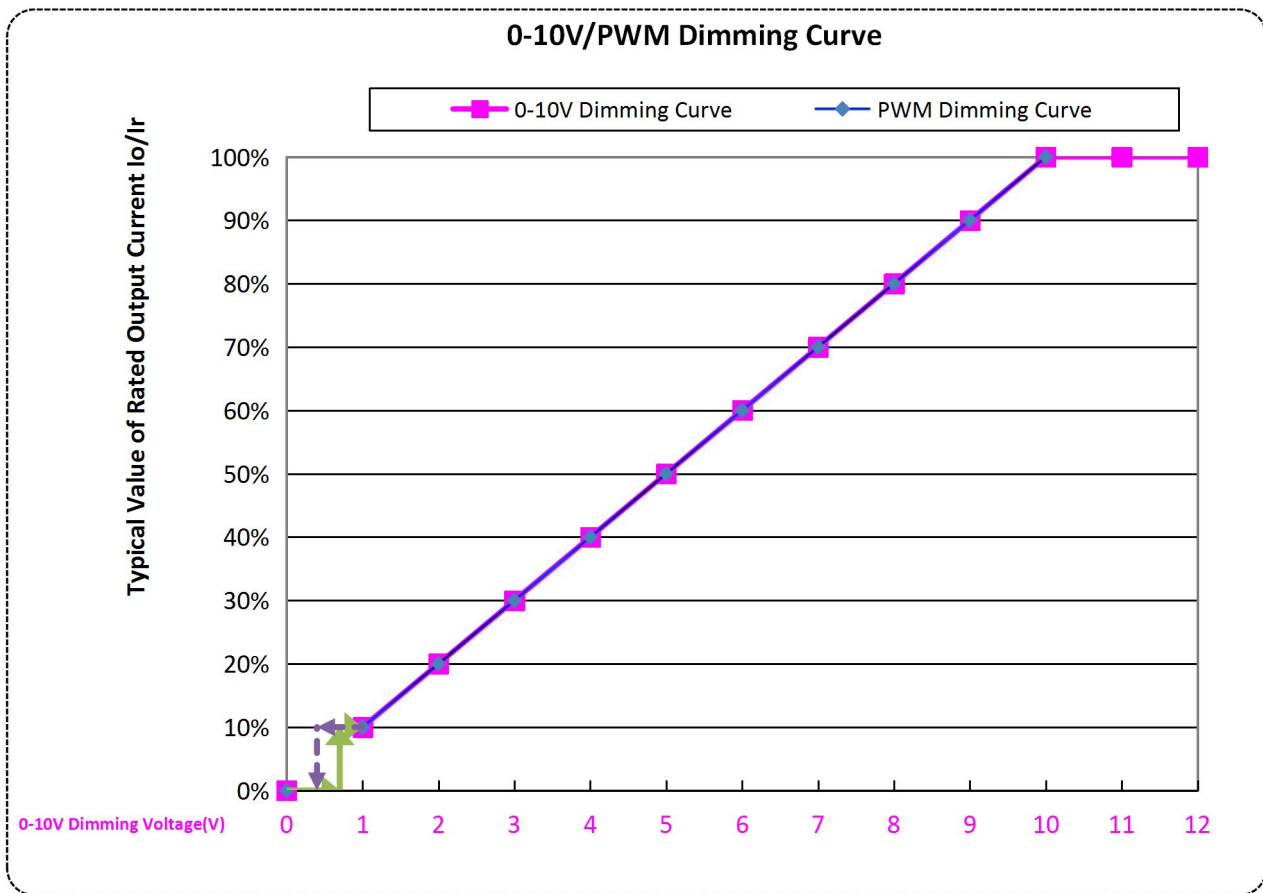


Note:


Dim to off model is realized by decreasing the output voltage, the power supply still has residual voltage when dim to off, so the start up voltage of the lamp should be higher than residual voltage.

### MECHANICAL OUTLINE

X6-240M types

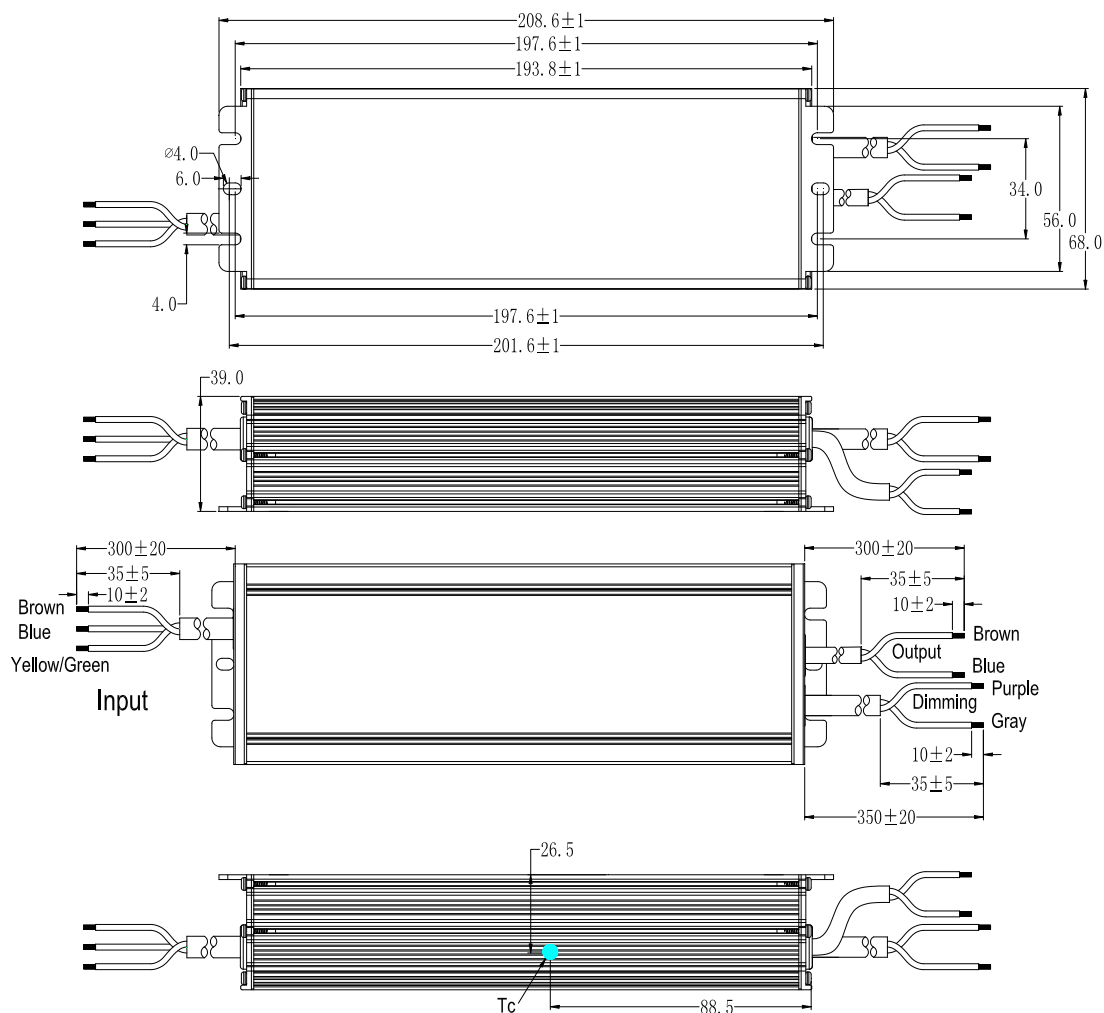

### X6-240V types

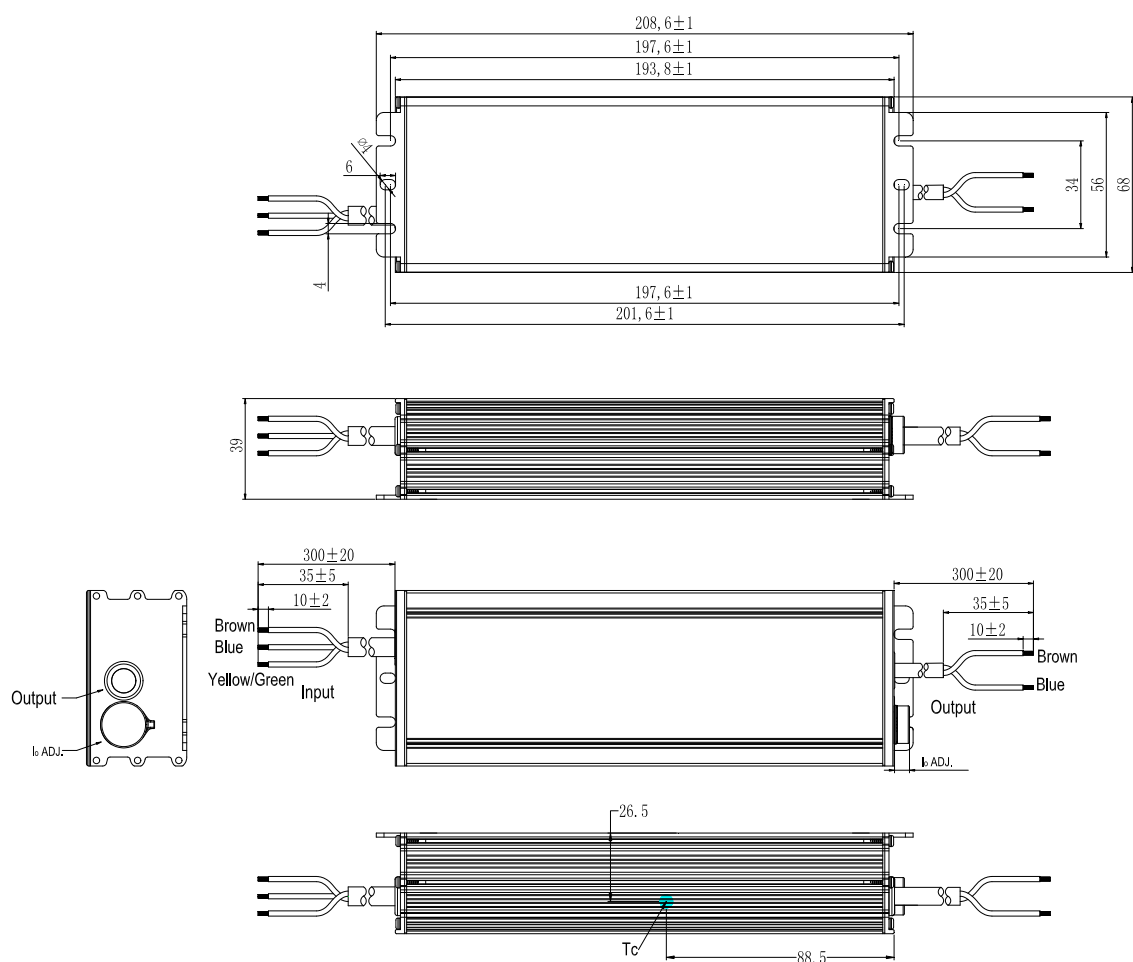

| Wire    | Specification                                                                                              | Note          |
|---------|------------------------------------------------------------------------------------------------------------|---------------|
| Input   | SJOW 17AWG*3 external diameter: 8.2mm L=300±10mm; L=300±10mm;<br>peel length 35mm, Tin-dip length 10mm     | for CCC/CE/UL |
| Output  | SJOW 17AWG*2 external diameter: 7.7mm L=300±10mm; L=300±10mm;<br>peel length 35mm, Tin-dip length 10mm     | for CCC/CE/UL |
| Dimming | UL2733 22AWG*2C external diameter: 5.45mm L=350±10mm;<br>L=300±10mm, peel length 35mm, Tin-dip length 10mm |               |

[illegible]