

# MRS-150-U series

150W Constant Voltage Enclosed Switching Power Supply



## ■ Features:

- Universal AC input / Full range
- Low no-load power consumption < 0.5W
- Protections: Over current / Short circuit / Over Voltage / Over temperature
- Compact size with a low 1U profile
- LED indicator for power on
- Wide range of operating temperature range: -30°C to +70°C
- Operating altitude up to 5000m



## © MODEL NUMBERING

MRS	-	150	-	X	-	U	-	Y
SERIES		RATED OUTPUT POWER		RATED OUTPUT VOLTAGE		INPUT VOLTAGE RANGE		OPTIONS
		150 means 150W		X = 12	12V	U means 85~264VAC / 120~373VDC		Y = C Terminal block with cover
				X = 15	15V			
				X = 24	24V			
				X = 36	36V			Y = Q Conformal coating
				X = 48	48V			

## © ELECTRICAL SPECIFICATION

MODEL	MRS-150-12-U	MRS-150-15-U	MRS-150-24-U	MRS-150-36-U	MRS-150-48-U
<b>OUTPUT</b>					
RATED VOLTAGE	12V	15V	24V	36V	48V
RATED CURRENT	12.5A	10A	6.5A	4.3A	3.3A
RATED POWER	150W	150W	156W	154.8W	158.4W
LINE REGULATION	± 0.5%				
LOAD REGULATION	± 0.5%				
RIPPLE & NOISE (MAX.) [2]	150mV <sub>p-p</sub>	150mV <sub>p-p</sub>	200mV <sub>p-p</sub>	200mV <sub>p-p</sub>	200mV <sub>p-p</sub>
HOLD UP TIME (TYP.)	16ms / 230VAC at full load; 8ms / 115VAC at full load				
<b>INPUT</b>					
VOLTAGE RANGE	85 ÷ 264VAC; 120 ÷ 373VDC				
FREQUENCY RANGE	47 ÷ 63Hz				
EFFICIENCY (TYP.)	86%	87%	88%	88%	89%
AC CURRENT (TYP.)	4A / 230VAC; 2A / 115VAC				
INRUSH CURRENT (TYP.)	60A / 230VAC; 30A / 115VAC				
LEAKAGE CURRENT (MAX.)	0.75mA / 240VAC				

# MRS-150-U series

150W Constant Voltage Enclosed Switching Power Supply



## PROTECTIONS

<b>OVER CURRENT</b>	Range: 110% ÷ 150% rated current				
	Type: hiccup mode, auto-recovery.				
<b>SHORT CIRCUIT</b>	Type: hiccup mode, auto-recovery.				
<b>OVER VOLTAGE</b>	≤ 16.2VDC	≤ 21.75VDC	≤ 33.6VDC	≤ 48.6VDC	≤ 60VDC
	Type: shut down output voltage. Re-power on to recovery.				
<b>OVER TEMPERATURE</b>	Type: shut down output voltage. Auto-recovery.				

## WORKING ENVIRONMENT

<b>WORKING TEMPERATURE</b>	-30°C ÷ 70°C (Refer to Temperature Derating Curve)
<b>WORKING HUMIDITY</b>	20 ÷ 90% RH non-condensing
<b>STORAGE TEMPERATURE AND HUMIDITY</b>	-40°C ÷ 85°C, 10 ÷ 95% RH non-condensing
<b>TEMPERATURE COEFFICIENT</b>	± 0.03% / °C
<b>OPERATION ALTITUDE (MAX.)</b>	[5] 5000m

## SAFETY AND EMC REGULATIONS


<b>SAFETY STANDARDS</b>	Compliance to EN62368-1, EN60335-1, EN61558-1, EN61558-2-16
<b>WITHSTAND VOLTAGE</b>	IN/OUT: 400VAC (< 10mA); IN/GND: 2000VAC (< 10mA) ; OUT/GND: 1250VAC (< 10mA)
<b>ISOLATION RESISTANCE</b>	IN/OUT, IN/GND, OUT/GND: 50MΩ/500VDC
<b>EMC EMISSION</b>	Compliance to EN55032
<b>EMC IMMUNITY</b>	Compliance to EN55035; EN61000-4-2, -3, -4, -5, -6, -11
<b>HARMONIC CURRENT</b>	Compliance to EN61000-3-3, EN61000-3-2

## OTHERS


<b>MTBF (MIN.)</b>	300 000h / 25°C per MIL-HDBK-217F
<b>DIMENSIONS AND CASE MATERIAL</b>	159 x 97 x 30mm (L x W x H); Metal (AL1100, SGCC)
<b>NET WEIGHT</b>	0.41kg

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load, 25°C of ambient temperature and humidity <75% RH.
2. Ripple & noise is measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability.
4. Case needs to be connected to the earth (⊕) of the system when the terminal equipment in operating.
5. The room temperature derating of 5°C / 1000m is needed for operating altitude greater than 2000m.
6. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

© DERATING CURVE

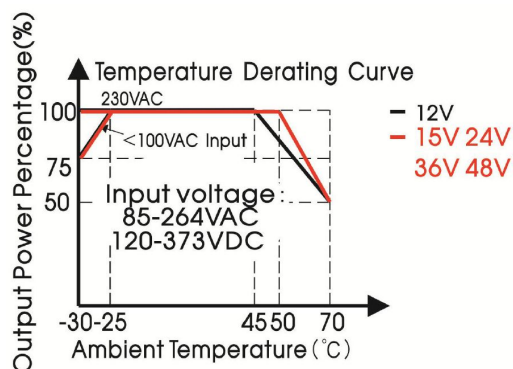

© STATIC CHARACTERISTIC

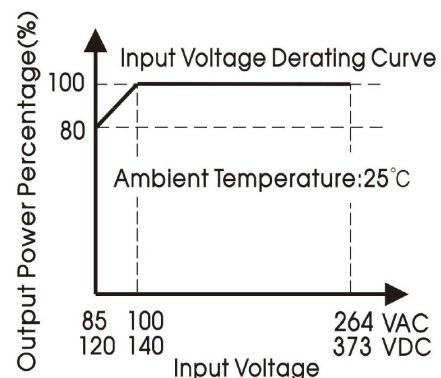


# MRS-150-U series

150W Constant Voltage Enclosed Switching Power Supply



## © MECHANICAL SPECIFICATION of MRS-150-U and MRS-150-U-Q

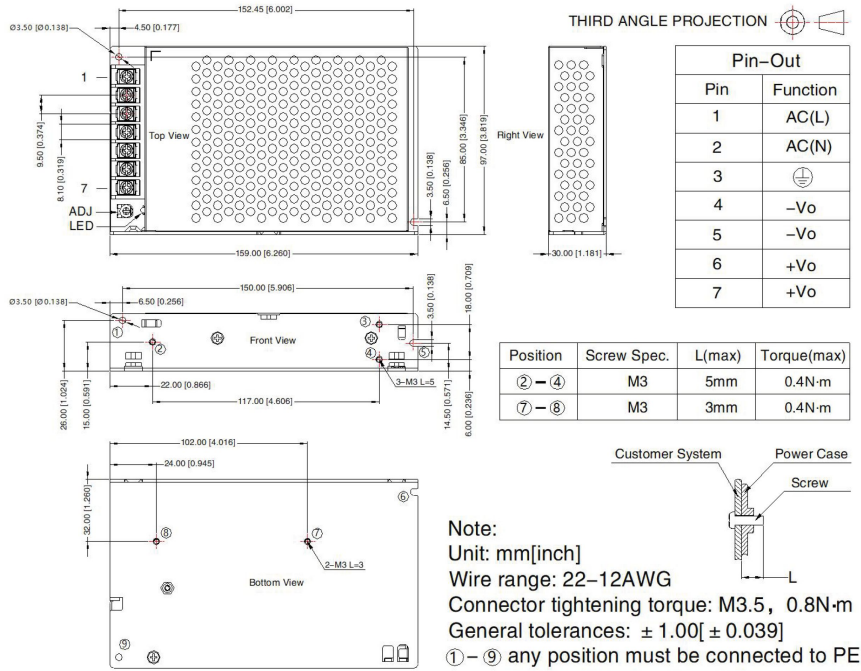

## © MECHANICAL SPECIFICATION of MRS-150-U-C

