

Series PCC60W-MC-MATCH1400

60W multicurrent selectable output LED Power Supply with PFC function



■ Features:

- Constant current design
- 4 kinds of output current selectable
- Output current adjustment ($\pm 10\%$) by built-in potentiometer
- Built-in active PFC function
- Universal AC input / Full range
- Protections: Short circuit / Overcurrent / Overvoltage
- Cooling by free air convection
- Isolation class II



ELECTRICAL SPECIFICATION

MODEL	PCC60W-MC-MATCH-1400			
OUTPUT				
NO OUTPUT DC VOLTAGE (max.)	45V			
OUTPUT NUMBER	CH1	CH2	CH3	CH4
RATED CURRENT	700mA	900mA	1050mA	1400mA
VOLTAGE RANGE	20 ÷ 42V			
CURRENT ADJUSTMENT [1]	630 ÷ 770mA	810 ÷ 990mA	945 ÷ 1155mA	1260 ÷ 1540mA
CURRENT ACCURACY	$\pm 5\%$			
RATED POWER	58.8W			
LINE REGULATION	$\pm 1\%$			
LOAD REGULATION	$\pm 3\%$			
TOLERANCE [4]	$\pm 5\%$			
RIPPLE & NOISE (max.) [3]	1.5V _{p-p}	2V _{p-p}	2.5V _{p-p}	3V _{p-p}
SETUP, RISE, HOLDUP TIME [5]	800ms, 80ms, 20ms / 230VAC; 1300ms, 80ms, 20ms / 115VAC at full load			
INPUT				
VOLTAGE RANGE	90 ÷ 264VAC; 127 ÷ 370VDC			
FREQUENCY RANGE	47 ÷ 63Hz			
EFFICIENCY (typ.)	82%	84%	85%	86%
AC CURRENT (typ.)	1.0A/115VAC, 0.5A / 230VAC			
POWER FACTOR	PF > 0.9 / 230VAC; PF > 0.95 / 115VAC at full load			
PROTECTIONS				
OVER CURRENT	Range: 110 ÷ 130%			
	Type: constant current limiting to 50% rated voltage next hiccup mode. Recovers automatically after fault condition is removed.			
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.			
OVER VOLTAGE	Max. 50V			
	Type: hiccup mode. Recovers automatically after fault condition is removed.			

Series PCC60W-MC-MATCH1400

60W multicurrent selectable output LED Power Supply with PFC function



ENVIRONMENT

WORKING TEMPERATURE	-20°C ÷ 60°C
WORKING HUMIDITY	20 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
TEMPERATURE COEFFICIENT	± 0.03% / °C (0°C ÷ 50°C)

SAFETY & EMC REGULATIONS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13
WITHSTAND VOLTAGE	I-P/O-P: 3.0kVAC
ISOLATION RESISTANCE	I-P/O-P: 100MΩ/500VDC/25°C/70%
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547; IEC 61000-4-2, -3, -4, -5, -6, -8, -11
HARMONIC CURRENT	Compliance to EN61000-3-3; EN61000-3-2 class C

OTHERS

DIMENSIONS	121 x 81 x 28mm (L x W x H)
WEIGHT AND PACKING	0.23kg; 50pcs./box; box weight and dimensions: 12kg; 45.5 x 28 x 18.5cm


1. By built-in potentiometer.
2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
4. Tolerance includes set up tolerance, line regulation and load regulation.
5. Setup and rise time is measured from 0 to 90% rated output voltage.
6. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

Series PCC60W-MC-MATCH1400

60W multicurrent selectable output LED Power Supply with PFC function




ELECTRICAL SPECIFICATION

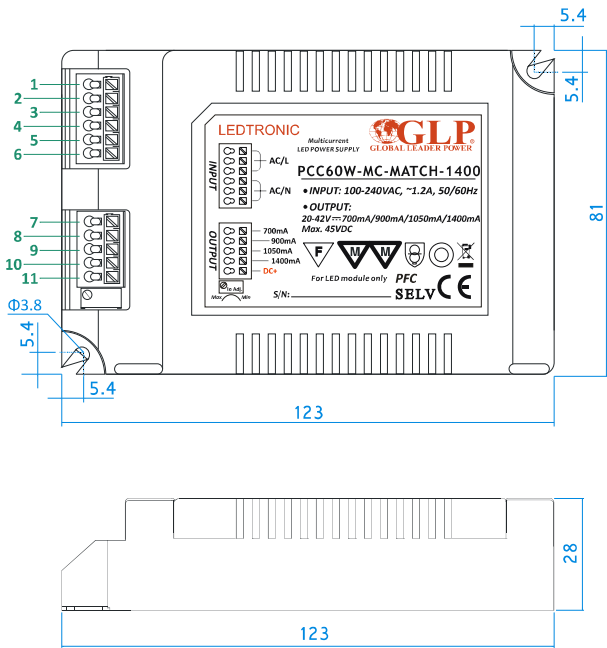

PIN No. Assignment			
PIN No.	Assignment	PIN No.	Assignment
1, 2, 3	Input: AC/L	7	Output CH1: V+ 700mA
4, 5, 6	Input: AC/N	8	Output CH2: V+ 900mA
		9	Output CH3: V+ 1050mA
		10	Output CH4: V+ 1400mA
		11	Output: V- common

DERATING CURVE

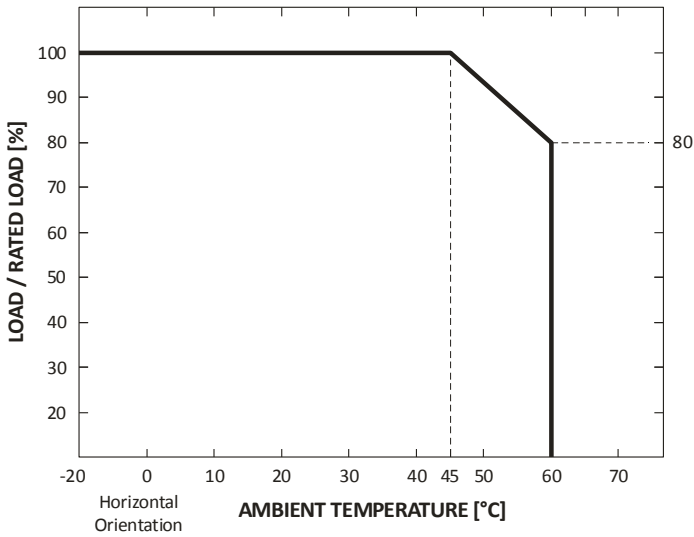

STATIC CHARACTERISTIC

