

PCC09W-DC-TDim series

9W LED Triac Dimmable Constant Current Power Supply



■ Features:

- Constant current design
- European AC input range
- Protections: Short circuit / Over Voltage
- Cooling by free air convection
- Suitable to work with AC triac dimmers
- Isolation class II



Ⓢ ELECTRICAL SPECIFICATION

MODEL	PCC09W-DC-TDim-350	PCC09W-DC-TDim-700
OUTPUT		
No Load Voltage (max.)	26V	13V
Rated Current	350mA	700mA
Voltage Range	13 ÷ 26V	7 ÷ 13V
Rated Power	9W	
Voltage Ripple & Noise (max.) [2]	1.50V _{P-P}	
Current Ripple (max.)	200%	
Line Regulation	± 1%	
Load Regulation	± 2%	
Current Accuracy	± 2%	
Setup, Rise Time [3]	100ms, 30ms / 230VAC at full load	

INPUT						
Voltage Range	180 ÷ 264VAC					
Frequency Range	47 ÷ 63Hz					
Efficiency (typ.)	82%					80%
AC Current (typ.)	0.06A / 230VAC					
Power Factor	PF > 0.95 / 230VAC at full load					
Max. No. Of PSU on Circuit Breaker	B10	B16	C10	C16	D10	D16
	35	56	74	118	148	236

DIMMING	
Dimming Range	1 – 100% of rated output current
Suitable dimmers	Triac dimmers (leading or trailing edge) compatible with capacitive or inductive load

PCC09W-DC-TDim series

9W LED Triac Dimmable Constant Current Power Supply



PROTECTIONS

Short Circuit	Type: CC mode, auto-recovery.	
Over voltage	16V Type: hiccup, auto-recovery	32V

WORKING ENVIRONMENT

Working Temperature	-20°C ÷ 50°C, ta: 50°C; tc: 80°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ 80°C, 10 ÷ 95% RH non-condensing

SAFETY and EMC REGULATIONS

Safety Standards	Compliance to EN 61347-1, EN 61347-2-13
Withstand Voltage	IN/OUT: 3.6kVAC
Isolation Resistance	IN/OUT: 100MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

DIMENSIONS	109 x 40 x 22mm (L x W x H)
Weight and Packing	65g; 100pcs./ctn; ctn weight and dimensions: 7kg; 26 x 23.5 x 28cm

EAN Code






1. All parameters NOT specially mentioned are measured at 230VAC input rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Setup and rise time is measured from 0 to 90% rated output voltage.
4. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

PCC09W-DC-TDim series

9W LED Triac Dimmable Constant Current Power Supply



MECHANICAL SPECIFICATION

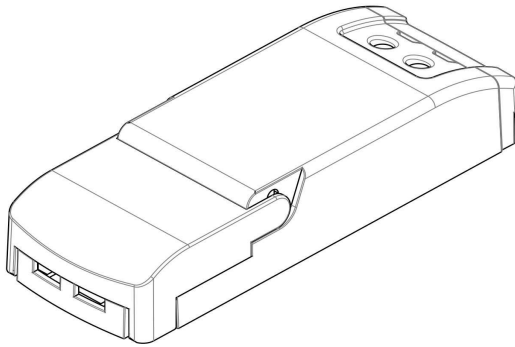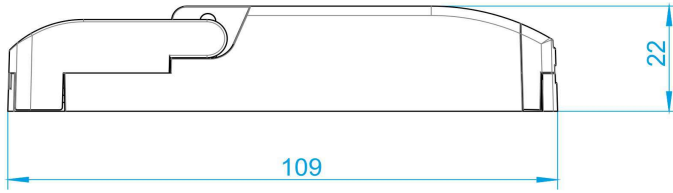

WIRING DIAGRAM

